



# PL-Q 2 Pin



# PL-Q 16W/835/2P 1CT/10BOX

Compact fluorescent lamps with a quadrant-like shape

#### Warnings and Safety

- $\boldsymbol{\cdot}$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap base	GR8 [GR8]				
Flux measurement reference	Sphere				
Life to 50% failures (nom.)	8,000 h				
Light Technical					
Colour Code	835 [CCT of 3500K]				
Luminous Flux	1,050 lm				
Colour designation	White (WH)				
Chromaticity Coordinate X (Nom)	0.409				
Chromaticity Coordinate Y (Nom)	0.394				
Correlated Colour Temperature	3500 K				
Luminous efficacy (rated) (nom.)	66.6 lm/W				
Colour rendering index (CRI)	81				
Operating and Electrical					
Power Consumption	16.2 W				

Lamp current (nom.)	0.195 A			
Controls and Dimming				
Dimmable	No			
Approval and Application				
Energy Efficiency Class	G			
Mercury (Hg) content (max.)	3 mg			
Mercury (Hg) content (nom.)	4.0 mg			
Energy consumption kWh/1,000 hours	17 kWh			
EPREL registration number	423605			
Product Data				
Order product name	PL-Q 16W/835/2P 1CT/10BOX			
Full product name	PL-Q 16W/835/2P 1CT/10BOX			
Full EOC	871150026966925			
Order code	26966925			


Datasheet, 2023, April 16 data subject to change

## PL-Q 2 Pin

Material no. (12 NC)	927939083540		
SAP numerator – quantity per pack	1		
EAN/UPC — Product/Case	8711500269669		
Numerator – packs per outer box	10		


EAN/UPC - Case	8711500269010

## Dimensional drawing




Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 16W/835/2P	40 mm	13.7 mm	27.0 mm	138 mm	49 mm	40.5 mm	135 mm
1CT/10BOX							


#### Photometric data

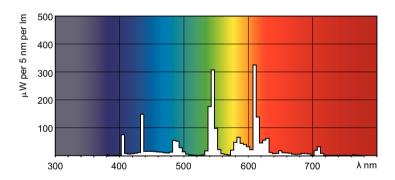

Spectral Power Distribution Colour - PL-Q 16W/835/2P 1CT/10BOX

#### Lifetime

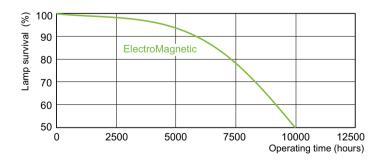

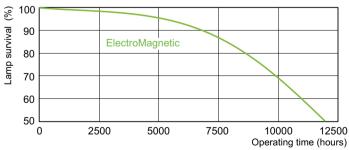


Life Expectancy Diagram - PL-Q 16W/835/2P 1CT/10BOX

Life Expectancy Diagram - PL-Q 16W/835/2P 1CT/10BOX

# PL-Q 2 Pin

#### Lifetime

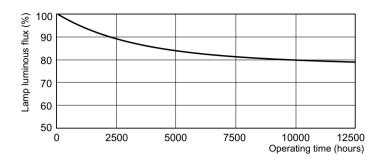

Lumen Maintenance Diagram - PL-Q 16W/835/2P 1CT/10BOX

