



# PL-Q 2 Pin

# PL-Q 16W/835/2P 1CT/10BOX

Compact fluorescent lamps with a quadrant-like shape

#### Warnings and Safety

- $\boldsymbol{\cdot}$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information						
Cap-Base	GR8 [GR8]					
Flux measurement reference	Sphere					
Life to 50% Failures (Nom)	8,000 hour(s)					
Light Technical						
Color Code	835 [CCT of 3500K]					
Luminous Flux	1,050 lm					
Color Designation	White (WH)					
Chromaticity Coordinate X (Nom)	0.409					
Chromaticity Coordinate Y (Nom)	0.394					
Correlated Color Temperature (Nom)	3500 K					
Luminous Efficacy (rated) (Nom)	66.6 lm/W					
Color rendering index (CRI)	81					
Operating and Electrical						
Power Consumption	16.2 W					

Lamp Current (Nom)	0.195 A				
Controls and Dimming					
Dimmable	No				
Approval and Application					
Energy Efficiency Class	G				
Mercury (Hg) Content (Max)	3 mg				
Mercury (Hg) Content (Nom)	4.0 mg				
Energy Consumption kWh/1000 h	17 kWh				
EPREL Registration Number	423605				
Product Data					
Order product name	PL-Q 16W/835/2P 1CT/10BOX				
Full product name	PL-Q 16W/835/2P 1CT/10BOX				
Full product code	871150026966925				
Order code	927939083540				


Datasheet, 2023, April 16 data subject to change

# PL-Q 2 Pin

Material Nr. (12NC)	927939083540
Local order code	PLQ16W8352P
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500269669


Numerator - Packs per outer box	10		
EAN/UPC - Case	8711500269010		

### Dimensional drawing




Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 16W/835/2P	40 mm	13.7 mm	27.0 mm	138 mm	49 mm	40.5 mm	135 mm
1CT/10BOX							


#### Photometric data

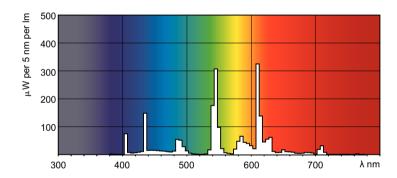

Spectral Power Distribution Colour - PL-Q 16W/835/2P 1CT/10BOX

#### Lifetime

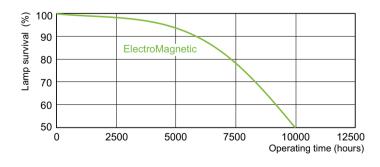

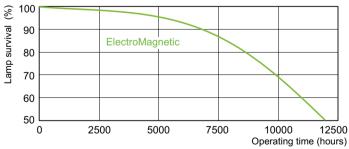


Life Expectancy Diagram - PL-Q 16W/835/2P 1CT/10BOX

Life Expectancy Diagram - PL-Q 16W/835/2P 1CT/10BOX

# PL-Q 2 Pin

#### Lifetime

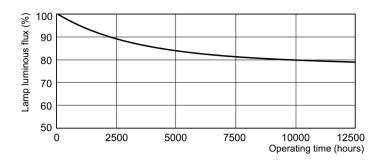

Lumen Maintenance Diagram - PL-Q 16W/835/2P 1CT/10BOX

