



# PL-Q 4 Pin



# PL-Q 16W/835/4P 1CT/10BOX

Compact fluorescent lamps with a quadrant-like shape

#### **Warnings and Safety**

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

| General Information                |                    |  |
|------------------------------------|--------------------|--|
| Cap-Base                           | GR10q              |  |
| Flux measurement reference         | Sphere             |  |
|                                    |                    |  |
| Light Technical                    |                    |  |
| Color Code                         | 835 [CCT of 3500K] |  |
| Luminous Flux                      | 1,050 lm           |  |
| Color Designation                  | White (WH)         |  |
| Chromaticity Coordinate X (Nom)    | 0.409              |  |
| Chromaticity Coordinate Y (Nom)    | 0.394              |  |
| Correlated Color Temperature (Nom) | 3500 K             |  |
| Luminous Efficacy (rated) (Nom)    | 66.6 lm/W          |  |
| Color rendering index (CRI)        | 81                 |  |
|                                    |                    |  |
| Operating and Electrical           |                    |  |
| Power Consumption                  | 16.2 W             |  |
| Lamp Current (Nom)                 | 0.195 A            |  |
|                                    |                    |  |


| Controls and Dimming          |                           |
|-------------------------------|---------------------------|
| Dimmable                      | Yes                       |
|                               |                           |
| Approval and Application      |                           |
| Energy Efficiency Class       | G                         |
| Mercury (Hg) Content (Max)    | 3 mg                      |
| Mercury (Hg) Content (Nom)    | 4 mg                      |
| Energy Consumption kWh/1000 h | 17 kWh                    |
| EPREL Registration Number     | 423608                    |
|                               |                           |
| Product Data                  |                           |
| Order product name            | PL-Q 16W/835/4P 1CT/10BOX |
| Full product name             | PL-Q 16W/835/4P 1CT/10BOX |
| Full product code             | 871150027206525           |
| Order code                    | 27206525                  |
| Material Nr. (12NC)           | 927939183540              |
| Numerator - Quantity Per Pack | 1                         |
| EAN/UPC - Product/Case        | 8711500272065             |

Datasheet, 2023, April 16 data subject to change

## PL-Q 4 Pin

| Numerator - Packs per outer box | 10            |
|---------------------------------|---------------|
| EAN/UPC - Case                  | 8711500270047 |

#### Dimensional drawing




 Product
 U (max)
 D (max)
 D1 (max)
 C (max)
 C1 (max)
 F (max)
 E (max)

 PL-Q 16W/835/4P
 40 mm
 13.7 mm
 27.5 mm
 138 mm
 49 mm
 40.5 mm
 135 mm


 1CT/10BOX


#### Photometric data

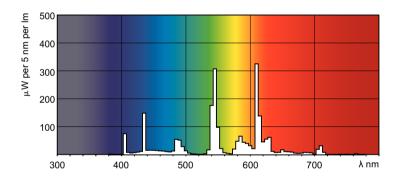

Spectral Power Distribution Colour - PL-Q 16W/835/4P 1CT/10BOX

### Lifetime

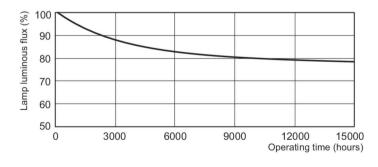

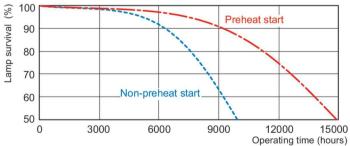


Lumen Maintenance Diagram - PL-Q 16W/835/4P 1CT/10BOX

Life Expectancy Diagram - PL-Q 16W/835/4P 1CT/10BOX

# PL-Q 4 Pin

#### Lifetime

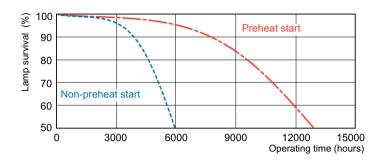

Life Expectancy Diagram - PL-Q 16W/835/4P 1CT/10BOX

