



MASTER TL5 High Output Eco

MASTER TL5 HO Eco 73=80W/840 1SL/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and colour rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap base	G5 [G5]	Power Consumption	73.3 W
Features	na [Not Applicable]	Lamp current (nom.)	0.550 A
Light Technical		Controls and Dimming	
Colour Code	840 [CCT of 4000K]	Dimmable	Yes
Luminous Flux	7,000 lm	Mechanical and Housing	
Colour designation	Cool White (CW)	Bulb shape	T5 [16 mm (T5)]
Correlated Colour Temperature	4000 K	Approval and Application	
Luminous efficacy (rated) (nom.)	89 lm/W	Mercury (Hg) content (nom.)	1.2 mg
Colour rendering index (CRI)	82		

MASTER TL5 High Output Eco

Energy consumption kWh/1,000 hours	80 kWh
Product Data	
Order product name	MASTER TL5 HO Eco 73=80W/840 1SL/40
Full product name	MASTER TL5 HO Eco 73=80W/840 1SL/40
Full EOC	872790090846601
Order code	90846601
Material no. (12 NC)	927991884033


Local order code	MTL5HOE73W840
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8727900908466
Numerator – packs per outer box	40
EAN/UPC – Case	8718291224839

Dimensional drawing

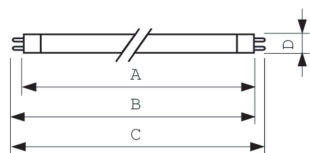

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Eco 73=80W/840 1SL/40	17 mm	1,449.0 mm	1,456.1 mm	1,453.7 mm	1,463.2 mm



Photometric data

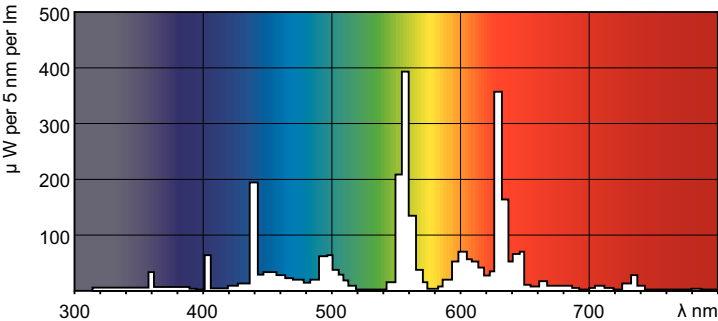

Spectral Power Distribution Colour – MASTER TL5 HO Eco 73=80W/840 1SL/40


MASTER TL5 High Output Eco

Lifetime

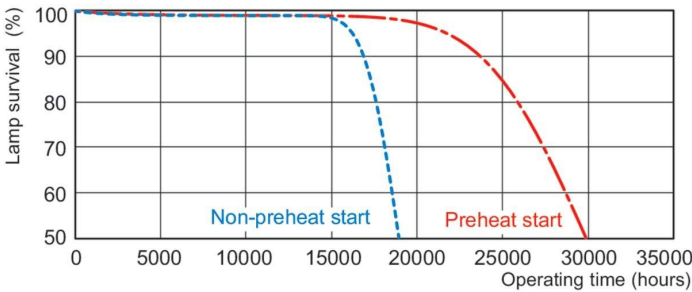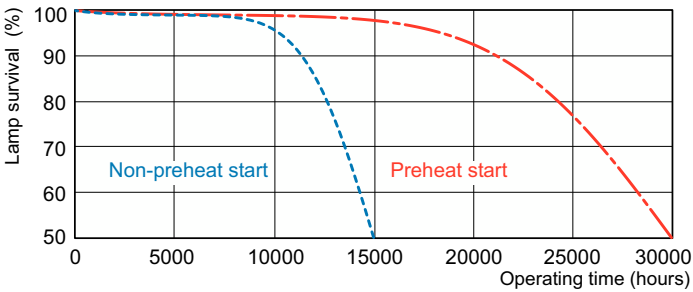

Life Expectancy Diagram - MASTER TL5 HO Eco 73=80W/840 1SL/40

Life Expectancy Diagram - MASTER TL5 HO Eco 73=80W/840 1SL/40

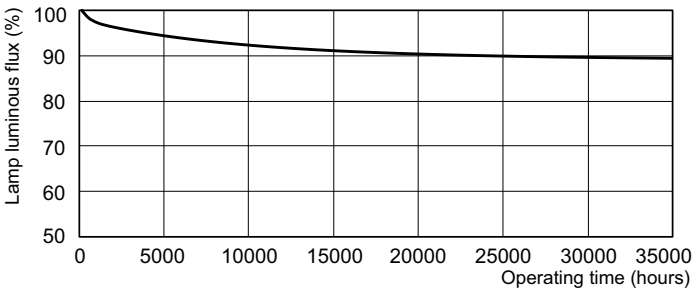

Lumen Maintenance Diagram - MASTER TL5 HO Eco 73=80W/840 1SL/40

