



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL 40W/10 SLV/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Mechanical and Housing	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Bulb Shape	T12
Life to 50% Failures (Nom)	9,000 hour(s)		
Useful Life (Nom)	5,000 hour(s)		
Light Technical		Approval and Application	
Color Code	10	Mercury (Hg) Content (Nom)	13.0 mg
Color Designation	Actinic		
Chromaticity Coordinate X (Nom)	220	UV	
Chromaticity Coordinate Y (Nom)	205	UV-A Radiation 0Hr (IEC)	12.4 W
UV Depreciation at 2000 h	20 %	UV-A Radiation 100Hr (IEC)	10.0 W
UV Depreciation at 5000 h	40 %		
Operating and Electrical		Product Data	
Power Consumption	39 W	Order product name	Actinic BL TL 40W/10 SLV/25
Lamp Current (Nom)	0.43 A	Full product name	Actinic BL TL 40W/10 SLV/25
Voltage (Nom)	101 V	Full product code	871150026026000
Voltage (Nom)	101 V	Order code	928011301020
		Material Nr. (12NC)	928011301020
		Numerator - Quantity Per Pack	1
		EAN/UPC - Product/Case	8711500260260
		Numerator - Packs per outer box	25

Actinic BL TL(-K) / TL-D(-K)

EAN/UPC - Case


8711500260277

Dimensional drawing



Product	D (max)	A (max)	B	C (max)
Actinic BL TL 40W/10 SLV/25	37.25 mm	1,198.4 mm	1,205.4 mm	1,212.4 mm

Photometric data

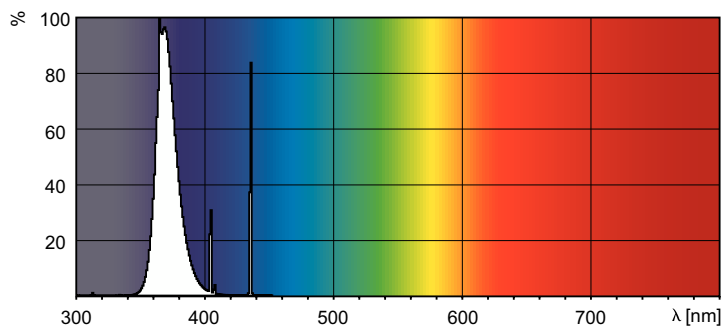

Spectral Power Distribution Colour - Actinic BL TL 40W/10 SLV/25

