



TL10 Plus

T10 PLUS 20W/750 1SL/25


The T10 Plus tubular fluorescent lamp line is available in 20W and 40W and is suitable for new installations, as well as replacement in existing installations. They work in conjunction with electromagnetic ballasts (Conventional and Quick Start) and electronic ballasts. Recommended for all types of installations, they deliver the reliability and guarantee of Philips applications.

Product data

General Information		Mechanical and Housing	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Bulb Shape	T10 [32 mm]
Life to 50% Failures (Nom)	15,000 hour(s)		
Light Technical		Approval and Application	
Color Code	750 [CCT of 5000K]	Mercury (Hg) Content (Nom)	8.5 mg
Luminous Flux	1,060 lm		
Color Designation	Cool White (CW)	Product Data	
Correlated Color Temperature (Nom)	5000 K	Order product name	T10 PLUS 20W/750 1SL/25
Color rendering index (CRI)	69	Full product name	T10 PLUS 20W/750 1SL/25
Operating and Electrical		Full product code	871869652948500
Power Consumption	20 W	Order code	928034607502
Lamp Current (Nom)	0.36 A	Material Nr. (12NC)	928034607502
Voltage (Nom)	62.0 V	Numerator - Quantity Per Pack	1
		EAN/UPC - Product/Case	8718696529485
		Numerator - Packs per outer box	25
		EAN/UPC - Case	8718696529492
Controls and Dimming			
Dimmable	Yes		

TL10 Plus


Dimensional drawing

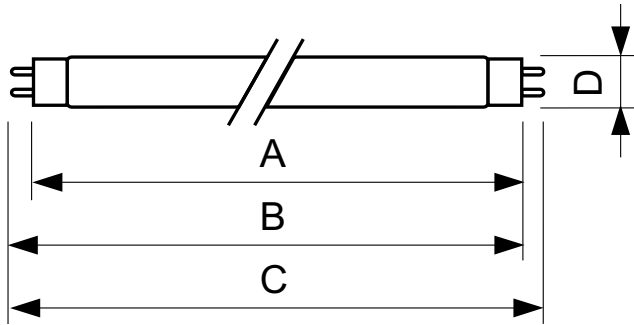

Product

T10 PLUS 20W/750 1SL/25

Photometric data

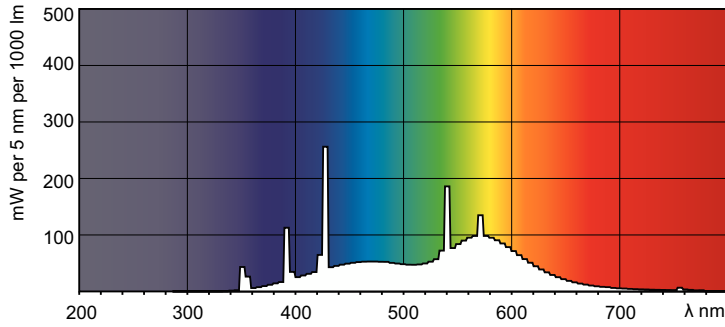

Spectral Power Distribution Colour - T10 PLUS 20W/750 1SL/25

