



# MASTER TL-D Food

## MASTER TL-D Food 58W/79 SLV/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	15,000 hour(s)
Light Technical	
Color Code	79
Luminous Flux	2,800 lm
Color Designation	Food
Correlated Color Temperature (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	48 lm/W
Color rendering index (CRI)	74
Operating and Electrical	
Power Consumption	58.5 W
Lamp Current (Nom)	0.670 A
Voltage (Nom)	111 V
Voltage (Nom)	111 V
Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	T8
Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	69 kWh
Product Data	
Order product name	MASTER TL-D Food 58W/79 SLV/25
Full product name	MASTER TL-D Food 58W/79 SLV/25
Full product code	871150070623240
Order code	928049002043
Material Nr. (12NC)	928049002043
Local order code	TLD58W79
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500706232
Numerator - Packs per outer box	25
EAN/UPC - Case	8711500613165


MASTER TL-D Food

Dimensional drawing

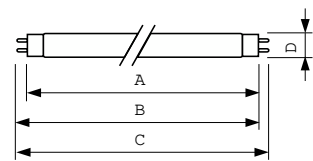


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food 58W/79 SLV/25	28 mm	1,500 mm	1,507.1 mm	1,504.7 mm	1,514.2 mm

Photometric data

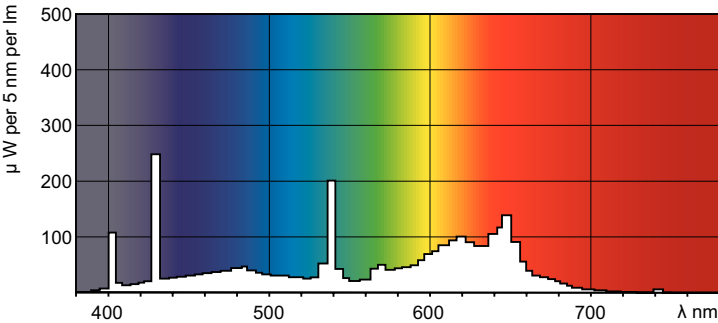


Spectral Power Distribution Colour - MASTER TL-D Food 58W/79 SLV/25

Lifetime

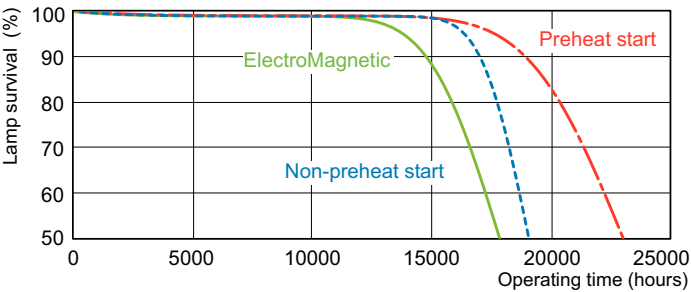


Life Expectancy Diagram - MASTER TL-D Food 58W/79 SLV/25

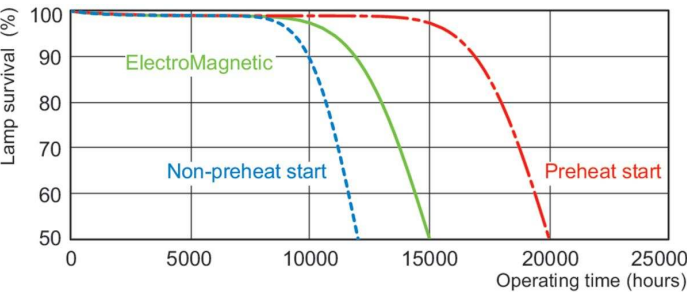

Life Expectancy Diagram - MASTER TL-D Food 58W/79 SLV/25

MASTER TL-D Food

Lifetime

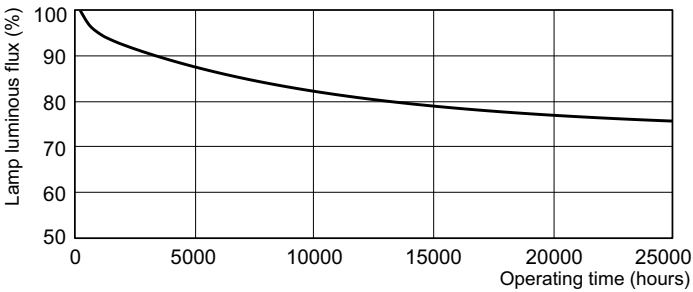

Lumen Maintenance Diagram - MASTER TL-D Food 58W/79 SLV/25

