



# MASTER CosmoWhite CPO-TT Xtra



# MST CosmoWhite CPO-TT Xtra 60W/628 E27

New-generation ceramic metal-halide tubular lamps used in outdoor applications, offering efficient and pleasant white light

#### **Warnings and Safety**

- · Use only in a totally enclosed luminaire, even during testing (IEC 61167, IEC 62035, IEC 60598)
- $\boldsymbol{\cdot}$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Use only with suitable electronic control gear
- · Control gear must include end-of-life protection (IEC 61167, IEC 62035)
- E27 lamp holders and other parts in luminaires should be designed to withstand the ignition voltage of the electronic control gear (rated at 5 kV ignition pulse)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information						
Cap-Base	E27					
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]					
Flux measurement reference	Sphere					
Life to 50% Failures (Nom)	32,000 hour(s)					
Light Technical						
Color Code	628 [CCT of 2800K]					
Luminous Flux	7,150 lm					
Color Designation	Warm White (WW)					
Chromaticity Coordinate X (Nom)	0.447					
Chromaticity Coordinate Y (Nom)	0.4					

Correlated Color Temperature (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	119.17 lm/W
Color rendering index (CRI)	70
Arc Length O (Nom)	14 mm
Operating and Electrical	
Power Consumption	60.0 W
Voltage (Nom)	92 V
Voltage (Nom)	92 V


Datasheet, 2024, February 8 data subject to change

## **MASTER CosmoWhite CPO-TT Xtra**

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T35
Approval and Application	
Energy Efficiency Class	E
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	60 kWh
EPREL Registration Number	473307


MST CosmoWhite CPO-TT Xtra 60W/628 E27				
MST CosmoWhite CPO-TT Xtra 60W/628 E27				
871829169034400				
928060109227				
928060109227				
1				
8718291690344				
12				
8718291690351				


## Dimensional drawing



Product	D (max)	D	0	L	C (max)
MST CosmoWhite CPO-TT Xtra 60W/628	36 mm	35 mm	14 mm	102 mm	156 mm
E27					

#### Photometric data

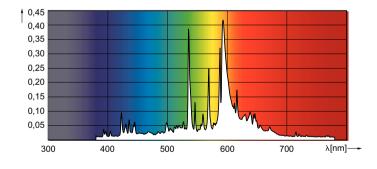



180°

150°


150°


Spectral Power Distribution Colour - MST CosmoWhite CPO-TT Xtra 60W/628 E27

Light Distribution Diagram - MST CosmoWhite CPO-TT Xtra 60W/628 E27

## **MASTER CosmoWhite CPO-TT Xtra**

#### Lifetime

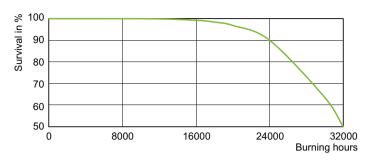

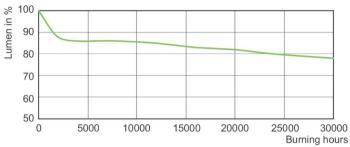

Life Expectancy Diagram - MST CosmoWhite CPO-TT Xtra 60W/628 E27

Lumen Maintenance Diagram - MST CosmoWhite CPO-TT Xtra 60W/628 E27



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.