



MSR Hot Restrike

MSR 125 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information		Color rendering index (CRI)	
Cap-Base	GZX9.5 [GZX9.5]		92
Operating Position	UNIVERSAL [Any or Universal (U)]	Arc Length O (Nom)	4.0 mm
Life to 50% Failures (Nom)	200 hour(s)	Operating and Electrical	
Light Technical		Power Consumption	125 W
Color Code	- [Not Specified]	Lamp Current (Nom)	1.9 A
Luminous Flux (Min)	8,000 lm	Controls and Dimming	
Luminous Flux	9,400 lm	Dimmable	Yes
Chromaticity Coordinate X (Nom)	332	Product Data	
Chromaticity Coordinate Y (Nom)	326	Order product name	MSR 125 HR 1CT/4
Correlated Color Temperature (Nom)	6000 K	Full product name	MSR 125 HR 1CT/4
Luminous Efficacy (rated) (Nom)	75 lm/W		

MSR Hot Restrike

Full product code	871869641492700
Order code	261354
Material Nr. (12NC)	928060205115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696414927


Numerator - Packs per outer box	4
EAN/UPC - Case	8718696414934

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F (min)	F (min)
MSR 125	11/16	3/16	1-1/2	1-5/8	1-9/16	3-1/16	1 inch	15/16	15/16
HR 1CT/4	inch	inch	inch	inch	inch	inch		inch	inch

Photometric data

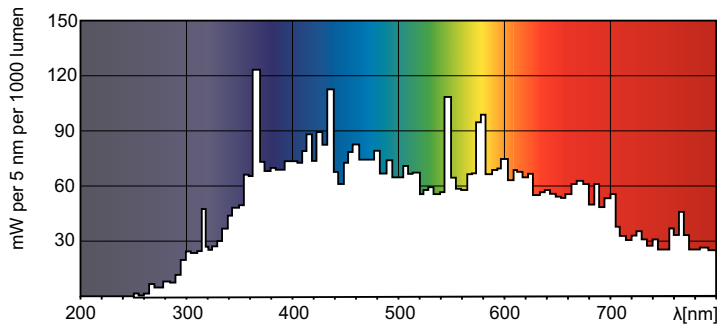

Spectral Power Distribution Colour - MSR 125 HR 1CT/4

