



MASTER CosmoWhite CPO-TT Xtra



MST CosmoWhite CPO-TT Xtra 140W/628 E40

New-generation ceramic metal-halide tubular lamps used in outdoor applications, offering efficient and pleasant white light

Warnings and Safety

- · Use only in a totally enclosed luminaire, even during testing (IEC 61167, IEC 62035, IEC 60598)
- $\boldsymbol{\cdot}$ The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Use only with suitable electronic control gear
- · Control gear must include end-of-life protection (IEC 61167, IEC 62035)
- E27 lamp holders and other parts in luminaires should be designed to withstand the ignition voltage of the electronic control gear (rated at 5 kV ignition pulse)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	E40				
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	32,000 hour(s)				
Light Technical					
Color Code	628 [CCT of 2800K]				
Luminous Flux	16,400 lm				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.447				
Chromaticity Coordinate Y (Nom)	0.4				

Correlated Color Temperature (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	116.31 lm/W
Color rendering index (CRI)	68
Arc Length O (Nom)	23 mm
Operating and Electrical	
Power Consumption	141.0 W
Voltage (Nom)	90 V
Voltage (Nom)	90 V


Datasheet, 2024, February 8 data subject to change

MASTER CosmoWhite CPO-TT Xtra

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46
Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	3.9 mg
Mercury (Hg) Content (Nom)	3.90 mg
Energy Consumption kWh/1000 h	141 kWh
EPREL Registration Number	473309


Product Data					
Order product name	MST CosmoWhite CPO-TT Xtra 140W/628 E40				
Full product name	MST CosmoWhite CPO-TT Xtra 140W/628 E40				
Full product code	871829169032000				
Order code	928060309227				
Material Nr. (12NC)	928060309227				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8718291690320				
Numerator - Packs per outer box	12				
EAN/UPC - Case	8718291690337				

Dimensional drawing




Product	D (max)	D	0	L	C (max)
MST CosmoWhite CPO-TT Xtra 140W/628	47 mm	46 mm	23 mm	132 mm	211 mm
E40					

Photometric data




Light Distribution Diagram - MST CosmoWhite CPO-TT Xtra 140W/628 E40

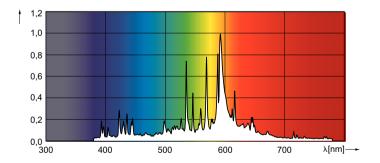


Spectral Power Distribution Colour - MST CosmoWhite CPO-TT Xtra 140W/628~E40

MASTER CosmoWhite CPO-TT Xtra

Lifetime

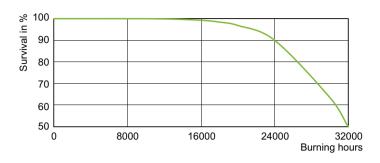

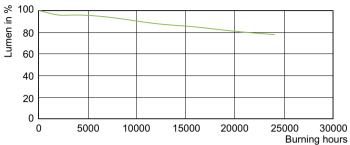

Life Expectancy Diagram - MST CosmoWhite CPO-TT Xtra 140W/628 E40

Lumen Maintenance Diagram - MST CosmoWhite CPO-TT Xtra 140W/628 E40

