



MASTERColour CDM-T Warm

MASTERColour CDM-T Warm 70W/925 G12

The world’s most efficient and lowest-cost accent lighting is to become available in highly efficient sparkling warm light. CDM Warm is the only light source that combines very warm light with near-perfect colour rendering and very high efficacy.

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G12 [G12]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	15,000 hour(s)

Light Technical	
Color Code	925
Color Designation	Warm
Chromaticity Coordinate X (Nom)	0.460
Chromaticity Coordinate Y (Nom)	0.405
Correlated Color Temperature (Nom)	2500 K

MASTERColour CDM-T Warm

Luminous Efficacy (rated) (Nom)	89 lm/W
Color rendering index (CRI)	93
Arc Length O (Nom)	5 mm

Operating and Electrical

Power Consumption	73.0 W
Voltage (Nom)	95 V
Voltage (Nom)	95 V

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	T19 [T 19mm]


Approval and Application

Mercury (Hg) Content (Nom)	8.6 mg
Energy Consumption kWh/1000 h	80 kWh

Product Data


Order product name	MASTERColour CDM-T Warm 70W/925 G12
Full product name	MASTERColour CDM-T Warm 70W/925 G12
Full product code	871829120305600
Order code	928061405131
Material Nr. (12NC)	928061405131
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291203056
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291203063

Dimensional drawing



Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-T	20 mm	0.75	5 mm	55 mm	57 mm	56 mm	103 mm
Warm 70W/925 G12		inch					

Photometric data

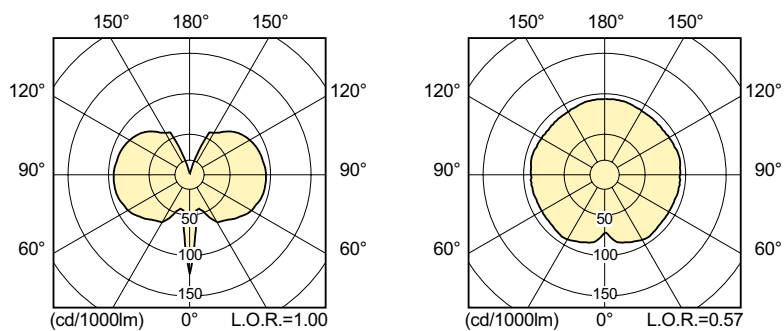

Light Distribution Diagram - MASTERColour CDM-T Warm 70W/925 G12

MASTERColour CDM-T Warm

