



MASTERColour CDM-R

MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT

Range of compact, high-efficiency, discharge reflector lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. Color 830 lamps may also use electromagnetic gear.
- · Use only with electronic control gear. Colour 830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Switching Cycle	1,000
Life to 50% Failures (Nom)	8,000 hour(s)
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	10 degree(s)
Luminous Intensity (Nom)	44,000 cd
Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.431
Chromaticity Coordinate Y (Nom)	0.400
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	2,150 lm/W
Color rendering index (CRI)	81
LLMF At End Of Nominal Lifetime (Nom) 48 %
Luminous Flux in 90° Cone (Rated)	2,000 lm
Operating and Electrical	
Power Consumption	39.1 W
Warm-up time to 60% light	120 s
Voltage (Nom)	86 V
Voltage (Nom)	86 V
Controls and Dimming	
Dimmable	No


Datasheet, 2023, May 1 data subject to change

MASTERColour CDM-R

Mechanical and Housing				
Bulb Finish	Clear			
Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]			
Approval and Application				
Mercury (Hg) Content (Nom)	2.8 mg			
Energy Consumption kWh/1000 h	42 kWh			
Product Data				
Order product name	MASTERC CDM-R 35W/830 E27 PAR30L 10D			
	1CT			

Full product name	MASTERC CDM-R 35W/830 E27 PAR30L 10D				
	1CT				
Full product code	871150021168200				
Order code	928070900691				
Material Nr. (12NC)	928070900691				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8711500211682				
Numerator - Packs per outer box	6				
EAN/UPC - Case	8711500211699				


Dimensional drawing



Product	D (max)	D	C (max)	С
MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT	97 mm	95 mm	123 mm	120 mm

Photometric data

1/12N°/ \ 12N°/ \ \12N°\|

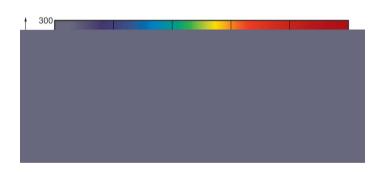


Light Distribution Diagram - MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT

Spectral Power Distribution Colour - MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT

MASTERColour CDM-R

Lifetime

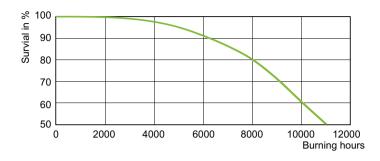



Life Expectancy Diagram - MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT

Lumen Maintenance Diagram - MASTERC CDM-R 35W/830 E27 PAR30L 10D 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.