MHN-TD

PHILIPS

Lighting

MHN-TD 150W/842 RX7s 1CT/12

Double-ended quartz Metal-halide lamp

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Operating and
Cap-Base	RX7s	Power Consumpt
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]	Voltage (Nom)
Flux measurement reference	Sphere	Voltage (Nom)
Life to 50% Failures (Nom)	10,500 hour(s)	
		Controls and D
Light Technical		Dimmable
Color Code	842 [CCT of 4200K]	
Luminous Flux	12,500 lm	Mechanical and
Color Designation	Cool White (CW)	Bulb Finish
Chromaticity Coordinate X (Nom)	0.371	Bulb Shape
Chromaticity Coordinate Y (Nom)	0.366	
Correlated Color Temperature (Nom)	4200 K	Approval and A
Luminous Efficacy (Rated) (Min)	73 lm/W	Energy Efficiency
Luminous Efficacy (rated) (Nom)	81 lm/W	Mercury (Hg) Con
Color rendering index (CRI)	81	Mercury (Hg) Con
Arc Length O (Nom)	17.8 mm	Energy Consumption

Operating and Electrical	
Power Consumption	155.0 W
Voltage (Nom)	98 V
Voltage (Nom)	98 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	TD
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	12.3 mg
Mercury (Hg) Content (Nom)	12.3 mg
Energy Consumption kWh/1000 h	155 kWh




MHN-TD

473320		
-		
-		


Material Nr. (12NC)	928076505190
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291215363
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291215370


Dimensional drawing

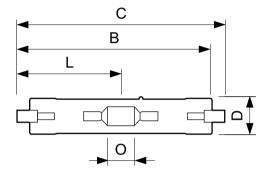


Product	D (max)	D	0	C (max)
MHN-TD 150W/842 RX7s 1CT/12	23.0 mm	0.89 inch	17.8 mm	135.4 mm

Photometric data






Light Distribution Diagram - MHN-TD 150W/842 RX7s 1CT/12

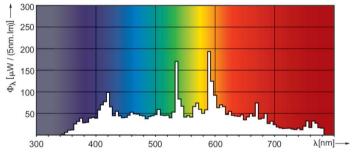


Spectral Power Distribution Colour - MHN-TD 150W/842 RX7s 1CT/12

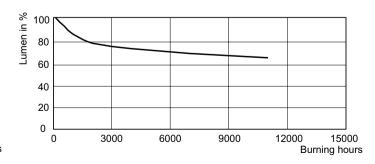

Lumen Maintenance Diagram - MHN-TD 150W/842 RX7s 1CT/12

Lifetime

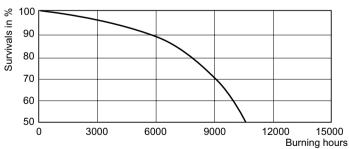

Life Expectancy Diagram - MHN-TD 150W/842 RX7s 1CT/12

MHN-TD



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, March 12 - data subject to change