



# MASTERColour CDM-TD

# MASTERC CDM-TD 150W/942 RX7s 1CT

Range of double-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

#### **Warnings and Safety**

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- $\boldsymbol{\cdot}$  Lamps may use electronic or electromagnetic control gear
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information					
Cap-Base	RX7S [RX7s]				
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	16,000 hour(s)				
Light Technical					
Color Code	942 [CCT of 4200K]				
Luminous Flux	13,650 lm				
Color Designation	Cool White (CW)				
Chromaticity Coordinate X (Nom)	0.371				
Chromaticity Coordinate Y (Nom)	0.366				
Correlated Color Temperature (Nom)	4200 K				
Luminous Efficacy (rated) (Nom)	90 lm/W				

Color rendering index (CRI)	96
Arc Length O (Nom)	10 mm
Operating and Electrical	
Power Consumption	152.0 W
Voltage (Nom)	103 V
Voltage (Nom)	103 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

Datasheet, 2023, April 16 data subject to change

## **MASTERColour CDM-TD**


Bulb Shape	T22 [T 22mm]		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Max)	8.3 mg		
Mercury (Hg) Content (Nom)	8.29 mg		
Energy Consumption kWh/1000 h	152 kWh		
EPREL Registration Number	473340		
Product Data			

MASTERC CDM-TD 150W/942 RX7s 1CT

Full product name	MASTERC CDM-TD 150W/942 RX7s 1CT			
Full product code	871150020025915			
Order code	928084805133			
Material Nr. (12NC)	928084805133			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8711500200259			
Numerator - Packs per outer box	12			
EAN/UPC - Case	8711500200266			


## Dimensional drawing


Order product name

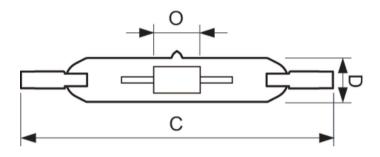

Product	D (max)	D	0	C (max)
MASTERC CDM-TD 150W/942 RX7s 1CT	22 mm		10 mm	137.43 mm

#### Photometric data









300

Spectral Power Distribution Colour - MASTERC CDM-TD 150W/942 RX7s 1CT

## **MASTERColour CDM-TD**

### Lifetime

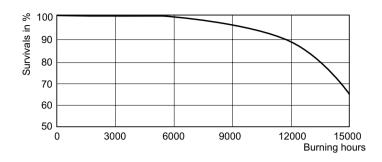



Life Expectancy Diagram - MASTERC CDM-TD 150W/942 RX7s 1CT

Lumen Maintenance Diagram - MASTERC CDM-TD 150W/942 RX7s 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.