



MASTERColour CDM-TC



MASTERColour CDM-TC 35W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$ The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- · Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | |
|----------------------------------|----------------------------------|
| Cap base | G8.5 |
| Operating position | UNIVERSAL [Any or Universal (U)] |
| Flux measurement reference | Sphere |
| Life to 50% failures (nom.) | 12,000 h |
| | |
| Light Technical | |
| Colour Code | 830 [CCT of 3000K] |
| Luminous Flux | 3,100 lm |
| Colour designation | Warm White (WW) |
| Chromaticity Coordinate X (Nom) | 0.434 |
| Chromaticity Coordinate Y (Nom) | 0.398 |
| Correlated Colour Temperature | 3000 K |
| Luminous efficacy (rated) (nom.) | 79 lm/W |

| Colour rendering index (CRI) | 81 |
|------------------------------|-----------------|
| Arc Length O (Nom) | 5 mm |
| | |
| Operating and Electrical | |
| Power Consumption | 39.1 W |
| Voltage (nom.) | 88 V |
| Voltage (nom.) | 88 V |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Lamp Finish | Clear |
| Bulb material | UV-Block Quartz |


Datasheet, 2023, April 16 data subject to change

MASTERColour CDM-TC

| Bulb shape | T14 |
|------------------------------------|------------------------------------|
| | |
| Approval and Application | |
| Energy Efficiency Class | G |
| Mercury (Hg) content (max.) | 3.1 mg |
| Mercury (Hg) content (nom.) | 3.1 mg |
| Energy consumption kWh/1,000 hours | 40 kWh |
| EPREL registration number | 473341 |
| | |
| Product Data | |
| Order product name | MASTERC CDM-TC 35W/830 G8.5 1CT/12 |

| Full product name | MASTERColour CDM-TC 35W/830 G8.5 1CT/12 |
|-----------------------------------|---|
| Full EOC | 871150020000615 |
| Order code | 20000615 |
| Material no. (12 NC) | 928085205125 |
| Local order code | 35CDMTC830 |
| SAP numerator – quantity per pack | 1 |
| EAN/UPC — Product/Case | 8711500200006 |
| Numerator – packs per outer box | 12 |
| EAN/UPC - Case | 8711500200013 |
| | |

Dimensional drawing





 Product
 D (max)
 D
 L (min)
 L (max)
 L (max)
 C (max)


 MASTERC CDM-TC 35W/830
 15 mm
 0.5 in
 51 mm
 53 mm
 52 mm
 85 mm

 G8.5 ICT/12

Photometric data





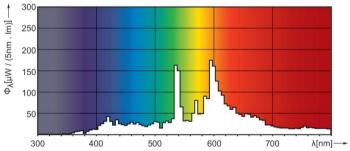



Light Distribution Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

Spectral Power Distribution Colour - MASTERC CDM-TC 35W/830 G8.5 1CT/12

MASTERColour CDM-TC

Lifetime

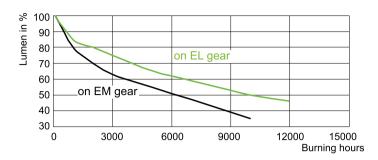

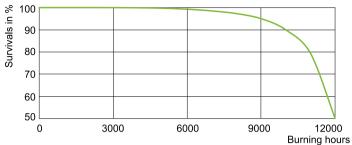

Lumen Maintenance Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

Life Expectancy Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.