



# MASTERColour CDM-TC

# MASTERC CDM-TC 35W/830 G8.5 1CT/12

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

#### **Warnings and Safety**

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- · Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

| General Information                |                                  |  |  |  |
|------------------------------------|----------------------------------|--|--|--|
| Cap-Base                           | G8.5 [G8.5]                      |  |  |  |
| Operating Position                 | UNIVERSAL [Any or Universal (U)] |  |  |  |
| Flux measurement reference         | Sphere                           |  |  |  |
| Life to 50% Failures (Nom)         | 12,000 hour(s)                   |  |  |  |
|                                    |                                  |  |  |  |
| Light Technical                    |                                  |  |  |  |
| Color Code                         | 830 [CCT of 3000K]               |  |  |  |
| Luminous Flux                      | 3,100 lm                         |  |  |  |
| Color Designation                  | Warm White (WW)                  |  |  |  |
| Chromaticity Coordinate X (Nom)    | 0.434                            |  |  |  |
| Chromaticity Coordinate Y (Nom)    | 0.398                            |  |  |  |
| Correlated Color Temperature (Nom) | 3000 K                           |  |  |  |
| Luminous Efficacy (rated) (Nom)    | 79 lm/W                          |  |  |  |
|                                    |                                  |  |  |  |

| Color rendering index (CRI) | 81              |  |  |  |
|-----------------------------|-----------------|--|--|--|
| Arc Length O (Nom)          | 5 mm            |  |  |  |
|                             |                 |  |  |  |
| Operating and Electrical    |                 |  |  |  |
| Power Consumption           | 39.1 W          |  |  |  |
| Voltage (Nom)               | 88 V            |  |  |  |
| Voltage (Nom)               | 88 V            |  |  |  |
|                             |                 |  |  |  |
| Controls and Dimming        |                 |  |  |  |
| Dimmable                    | No              |  |  |  |
|                             |                 |  |  |  |
| Mechanical and Housing      |                 |  |  |  |
| Bulb Finish                 | Clear           |  |  |  |
| Bulb Material               | UV-Block Quartz |  |  |  |


Datasheet, 2023, April 16 data subject to change

# **MASTERColour CDM-TC**

| Bulb Shape                    | T14 [T 14 mm]                      |  |  |  |  |
|-------------------------------|------------------------------------|--|--|--|--|
|                               | [                                  |  |  |  |  |
| Approval and Application      |                                    |  |  |  |  |
| Energy Efficiency Class       | G                                  |  |  |  |  |
| Mercury (Hg) Content (Max)    | 3.1 mg                             |  |  |  |  |
| Mercury (Hg) Content (Nom)    | 3.1 mg                             |  |  |  |  |
| Energy Consumption kWh/1000 h | 40 kWh                             |  |  |  |  |
| EPREL Registration Number     | 473341                             |  |  |  |  |
|                               |                                    |  |  |  |  |
| Product Data                  |                                    |  |  |  |  |
| Order product name            | MASTERC CDM_TC 35W/830 G8 5 1CT/12 |  |  |  |  |


| Full product name               | MASTERC CDM-TC 35W/830 G8.5 1CT/12 |
|---------------------------------|------------------------------------|
| Full product code               | 871150020000615                    |
| Order code                      | 928085205125                       |
| Material Nr. (12NC)             | 928085205125                       |
| Numerator - Quantity Per Pack   | 1                                  |
| EAN/UPC - Product/Case          | 8711500200006                      |
| Numerator - Packs per outer box | 12                                 |
| EAN/UPC - Case                  | 8711500200013                      |
|                                 |                                    |


### Dimensional drawing



| Product             | D (max) | D        | 0    | L (min) | L (max) | L     | C (max) |
|---------------------|---------|----------|------|---------|---------|-------|---------|
| MASTERC CDM-TC      | 15 mm   | 0.5 inch | 5 mm | 51 mm   | 53 mm   | 52 mm | 85 mm   |
| 35W/830 G8.5 1CT/12 |         |          |      |         |         |       |         |

#### Photometric data

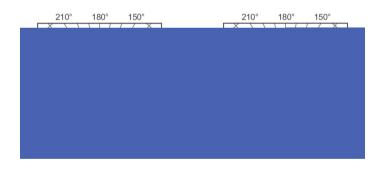

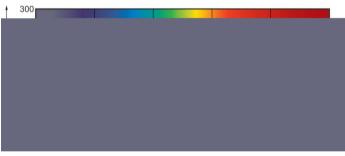



Light Distribution Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

Spectral Power Distribution Colour - MASTERC CDM-TC 35W/830 G8.5 1CT/12

# **MASTERColour CDM-TC**

#### Lifetime

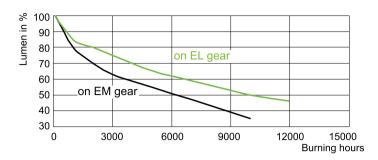

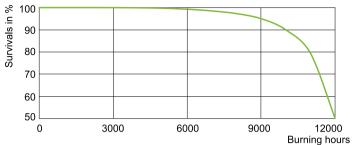

Lumen Maintenance Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12

Life Expectancy Diagram - MASTERC CDM-TC 35W/830 G8.5 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.