



MASTERColour CDM-R

MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT

Range of compact, high-efficiency, discharge reflector lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- \cdot Use only with electronic control gear. Color 830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	E26 [Single Contact Medium Screw]				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Life to 50% Failures (Nom)	8,000 hour(s)				
Light Technical					
Color Code	830 [CCT of 3000K]				
Beam Angle (Nom)	30 degree(s)				
Luminous Intensity (Nom)	5,300 cd				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.433				
Chromaticity Coordinate Y (Nom)	0.402				
Correlated Color Temperature (Nom)	3000 K				
Color rendering index (CRI)	81				

Operating and Electrical	
Power Consumption	39.1 W
Warm-up time to 60% light	120 s
Voltage (Nom)	88 V
Voltage (Nom)	88 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	PAR20
Approval and Application	
Mercury (Hg) Content (Nom)	2.8 mg


Datasheet, 2023, September 22 data subject to change

MASTERColour CDM-R

Energy Consumption kWh/1000 h	42 kWh
Product Data	
Order product name	MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT
Full product name	MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT
Full product code	872790088714300
Order code	928085400610


Material Nr. (12NC)	928085400610
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900887143
Numerator - Packs per outer box	12
EAN/UPC - Case	8727900887150
"	

Dimensional drawing




Product	D (max)	D	C (max)	С
MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT	65 mm	64 mm	92 mm	90 mm

Photometric data






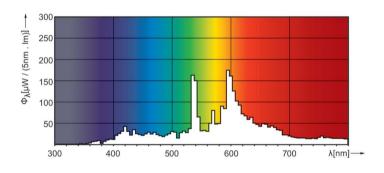

Spectral Power Distribution Colour - MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT

MASTERColour CDM-R

Lifetime

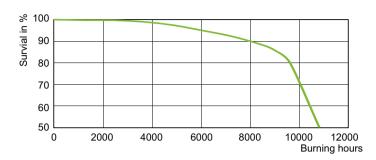



Life Expectancy Diagram - MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT

Lumen Maintenance Diagram - MASTERC CDM-R 35W/830 E26 PAR20 30D 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.