



ML

ML 250W E27 225-235V SG 1SL/12

Mixed Light lamps

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	E27 [E27]
Operating position	VBU/VBD30 [Vertical or Base Up/Base Down +/-30D]
Life to 50% failures (nom.)	10,000 h
Light Technical	
Chromaticity Coordinate X (Nom)	402
Chromaticity Coordinate Y (Nom)	382
Luminous efficacy (rated) (nom.)	20.4 lm/W
Colour rendering index (CRI)	65
Operating and Electrical	
Power Consumption	265.0 W
Voltage (nom.)	230 V
Voltage (nom.)	230 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Coated glass



Bulb material	Soft Glass
Bulb shape	ED90 [ED 90 mm]
Approval and Application	
Mercury (Hg) content (nom.)	16.3 mg
Energy consumption kWh/1,000 hours	291 kWh
Product Data	
Order product name	ML 250W E27 225-235V SG 1SL/12
Full product name	ML 250W E27 225-235V SG 1SL/12
Full EOC	871150020139315
Order code	20139315
Material no. (12 NC)	928096056822
Local order code	MLL250ES
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500201393
Numerator – packs per outer box	12
EAN/UPC - Case	8711500201409

Dimensional drawing

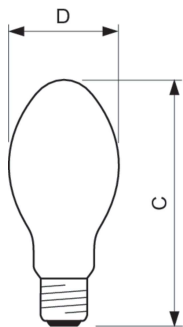

Product	D (max)	C (max)
ML 250W E27 225-235V SG 1SL/12	91 mm	212 mm



Photometric data

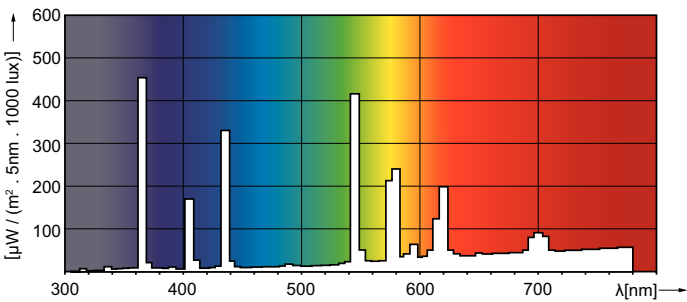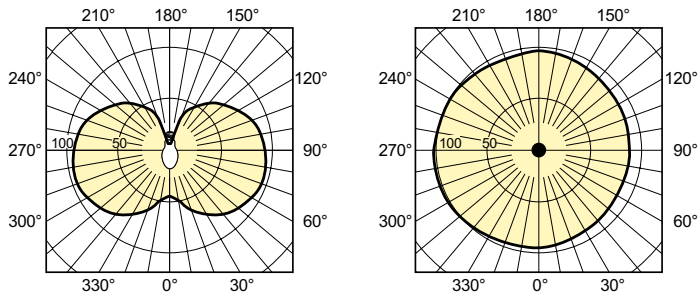

Light Distribution Diagram - ML 250W E27 225-235V SG 1SL/12

Spectral Power Distribution Colour - ML 250W E27 225-235V SG 1SL/12

Lifetime

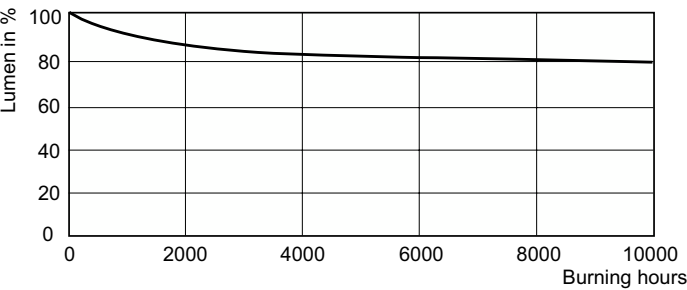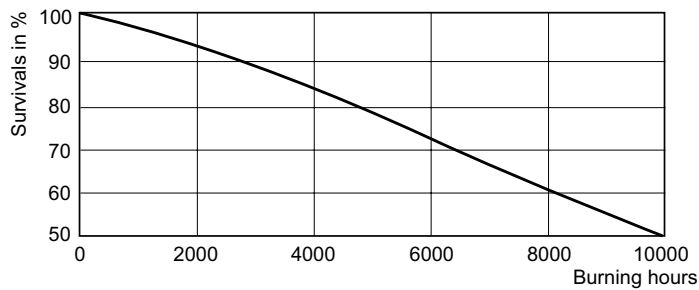

Life Expectancy Diagram - ML 250W E27 225-235V SG 1SL/12

Lumen Maintenance Diagram - ML 250W E27 225-235V SG 1SL/12

