# Lighting

**PHILIPS** 



G <sup>A</sup>

# MASTERColour CDM-R111

# MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

The MASTERColour CDM-R111 combines the trendy look of 111 mm aluminum reflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

#### Warnings and Safety

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### Product data

General Information		Correlated Color Temperature (Nom)	4200 K
Cap-Base	GX8.5	Color rendering index (CRI)	96
Operating Position	UNIVERSAL [Any or Universal (U)]	LLMF At End Of Nominal Lifetime (Nom) 60 %	
Switching Cycle	1,000	Luminous Flux in 90° Cone (Rated)	2,800 lm
Flux measurement reference	Narrow Cone		
Life to 50% Failures (Nom)	11,000 hour(s)	Operating and Electrical	
		Power Consumption	73.2 W
Light Technical		Warm-up time to 60% light	120 s
Color Code	942 [CCT of 4200K]	Voltage (Nom)	92 V
Beam Angle (Nom)	24 degree(s)	Voltage (Nom)	92 V
Luminous Flux	2,800 lm		
Luminous Intensity (Nom)	14,300 cd	Controls and Dimming	
Color Designation	Cool White (CW)	Dimmable	No
Chromaticity Coordinate X (Nom)	0.371		
Chromaticity Coordinate Y (Nom)	0.366		


### **MASTERColour CDM-R111**

Mechanical and Housing	
Bulb Finish	Reflector
Bulb Shape	R111
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	6.6 mg
Mercury (Hg) Content (Nom)	6.3 mg
Energy Consumption kWh/1000 h	74 kWh
EPREL Registration Number	473360
Product Data	
Order product name	MASTERC CDM-R111 70W/942 GX8.5 24D


1CT/6

Full product name	MASTERC CDM-R111 70W/942 GX8.5 24D
	1CT/6
Full product code	871150021393810
Order code	928096905330
Material Nr. (12NC)	928096905330
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500213938
Numerator - Packs per outer box	6
EAN/UPC - Case	8711500213945

#### **Dimensional drawing**




#### Photometric data



Light Distribution Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

 Product
 D (max)
 C (max)


 MASTERC CDM-R11170W/942 GX8.5 24D 1CT/6
 111 mm
 95 mm

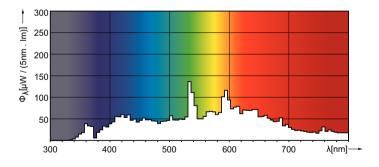

Spectral Power Distribution Colour - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

## MASTERColour CDM-R111

Lifetime

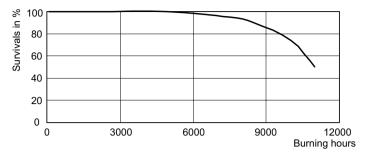

Life Expectancy Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

\$° 100 60 40 20 0 0 0 0 3000 6000 9000 12000 Burning hours

Lumen Maintenance Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, March 21 - data subject to change