



Architectural MSA

MSA 2500 DE UNP/1

The high luminous efficacy and optimal lamp filling of the double ended Architectural MSA lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

| General Information | |
|------------------------------------|--|
| Cap-Base | (P)SFC [(P)SFC] |
| Operating Position | P15 [Parallel +/-15D or Horizontal(HOR)] |
| Life to 50% Failures (Nom) | 2,500 hour(s) |
| Light Technical | |
| Color Code | 856 |
| Luminous Flux | 250,000 lm |
| Chromaticity Coordinate X (Nom) | 330 |
| Chromaticity Coordinate Y (Nom) | 360 |
| Correlated Color Temperature (Nom) | 5600 K |
| Luminous Efficacy (rated) (Nom) | 100 lm/W |
| Color rendering index (CRI) | 88 |
| Arc Length O (Nom) | 25 mm |
| Operating and Electrical | |
| Power Consumption | 2,500 W |

| Lamp Current (Nom) | 22.5 A |
|---------------------------------|-------------------|
| Controls and Dimming | |
| Dimmable | No |
| Product Data | |
| Order product name | MSA 2500 DE UNP/1 |
| Full product name | MSA 2500 DE UNP/1 |
| Full product code | 871150020208600 |
| Order code | 20208600 |
| Material Nr. (12NC) | 928099405103 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8718291548300 |
| Numerator - Packs per outer box | 1 |
| EAN/UPC - Case | 8711500202086 |


Architectural MSA

Dimensional drawing

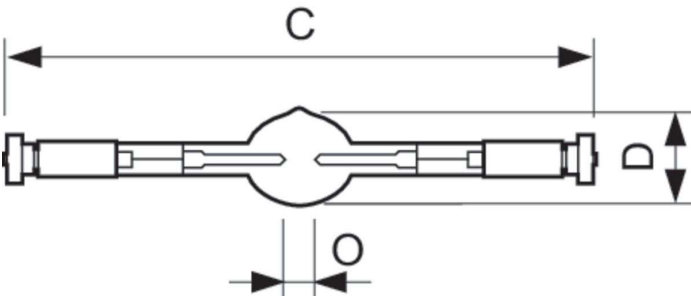

| Product | D (max) | O | C (max) |
|-------------------|---------|-------|---------|
| MSA 2500 DE UNP/1 | 41 mm | 25 mm | 364 mm |

Photometric data

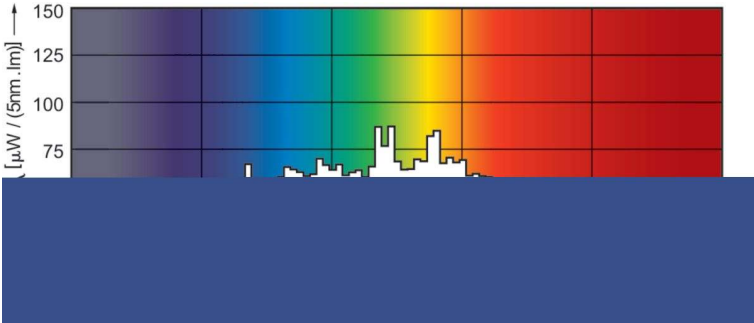

Spectral Power Distribution Colour – MSA 2500 DE UNP/1

