



MSR Gold™ SA Double Ended

MSR Gold™ 1200 SA/DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information			
Cap-Base	SFC10-4 [SFC10-4]	Correlated Color Temperature (Nom)	6000 K
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Efficacy (Rated) (Min)	77 lm/W
Life to 50% Failures (Nom)	750 hour(s)	Luminous Efficacy (rated) (Nom)	86 lm/W
		Color rendering index (CRI)	83
		Arc Length O (Nom)	7.0 mm
Light Technical		Operating and Electrical	
Color Code	- [Not Specified]	Power Consumption	1,200 W
Luminous Flux	103,000 lm	Lamp Current (Nom)	13.6 A
Chromaticity Coordinate X (Nom)	326		
Chromaticity Coordinate Y (Nom)	332		

MSR Gold™ SA Double Ended

Controls and Dimming	
Dimmable	No
Product Data	
Order product name	MSR Gold 1200 SA/DE 1CT/4
Full product name	MSR Gold™ 1200 SA/DE 1CT/4
Full product code	871829122121000
Order code	287144


Material Nr. (12NC)	928099605115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291221210
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291221227

Dimensional drawing

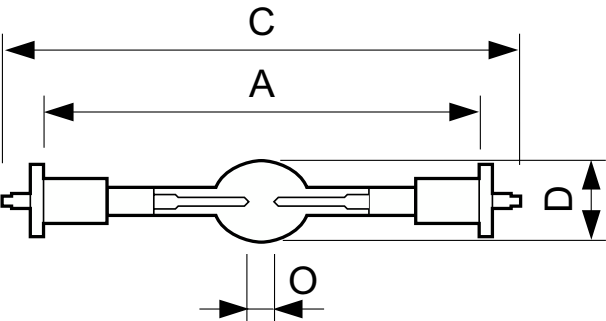

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold 1200 SA/DE 1CT/4	7/8 inch	5/16 inch	4-1/2 inch	4-9/16 inch	4-9/16 inch	5-3/8 inch

Photometric data

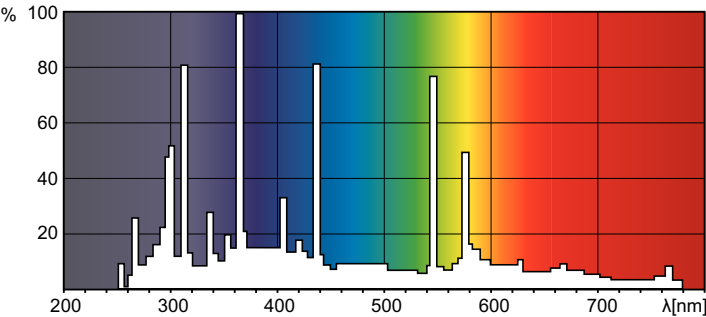

Spectral Power Distribution Colour - MSR Gold 1200 SA/DE 1CT/4

