



MSR Hot Restrike

MSR2500 HR 1CT/2

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


General Information		Luminous Efficacy (rated) (Nom)	
Cap-Base	G38 [G38]		92 lm/W
Operating Position	UNIVERSAL [Any or Universal (U)]	Color rendering index (CRI)	95
Life to 50% Failures (Nom)	500 hour(s)	Arc Length O (Nom)	14.0 mm
Light Technical		Operating and Electrical	
Color Code	- [Not Specified]	Power Consumption	2,500 W
Luminous Flux (Min)	207,900 lm	Lamp Current (Nom)	24.4 A
Luminous Flux	231,000 lm		
Chromaticity Coordinate X (Nom)	325	Controls and Dimming	
Chromaticity Coordinate Y (Nom)	328	Dimmable	Yes
Correlated Color Temperature (Nom)	6000 K		
Luminous Efficacy (Rated) (Min)	83 lm/W	Product Data	
		Order product name	MSR 2500 HR 1CT/2

MSR Hot Restrike

Full product name	MSR2500 HR 1CT/2
Full product code	872790092604000
Order code	245811
Material Nr. (12NC)	928104905114
Numerator - Quantity Per Pack	1


EAN/UPC - Product/Case	8727900926040
Numerator - Packs per outer box	2
EAN/UPC - Case	8727900926057

Dimensional drawing



Product	D	O	L	L (max)	L	C	F (max)	F	F
	(max)		(min)			(max)			(min)
MSR 2500	2-3/8	9/16	5 inch	5-1/16	5	9-1/2	2-11/16	2-9/16	2-1/2
HR 1CT/2	inch	inch		inch	inch	inch	inch	inch	inch

Photometric data

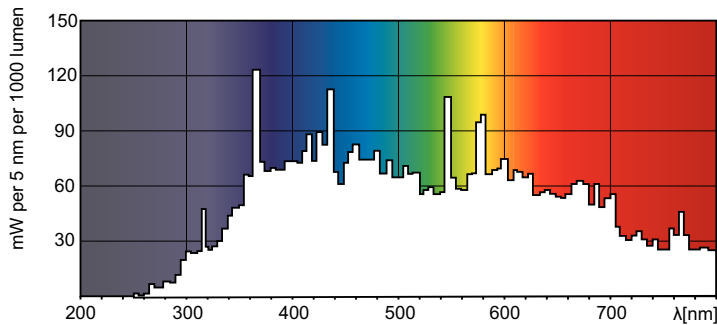

Spectral Power Distribution Colour - MSR 2500 HR 1CT/2

