



# **MASTER SOX PSG**

# MASTER SOX PSG 35W BY22d T50 1SL/12

Low-pressure sodium vapour lamps with a U-shaped discharge tube enclosed in a clear tubular outer bulb under vacuum that is maintained by a solid-state getter

#### **Product data**

General Information		
Cap-Base	BY22D [BY22d]	
Operating Position	H110 [Hanging +/-110D or Base Up (BU)]	
Life to 50% Failures (Nom)	18,000 hour(s)	
Light Technical		
Correlated Color Temperature (Nom)	1800 K	
Luminous Efficacy (rated) (Nom)	127 lm/W	
Operating and Electrical		
Lamp Current (Nom)	0.53 A	
Voltage (Nom)	70 V	
Voltage (Nom)	70 V	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Clear	

Bulb Shape	T50 [T 50mm]	
Approval and Application		
Mercury (Hg) Content (Nom)	0 mg	
Energy Consumption kWh/1000 h	41 kWh	
Product Data		
Order product name	MASTER SOX PSG 35W BY22d T50 1SL/12	
Full product name	MASTER SOX PSG 35W BY22d T50 1SL/12	
Full product code	871150059976615	
Order code	928148100058	
Material Nr. (12NC)	928148100058	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8711500599766	
Numerator - Packs per outer box	12	
EAN/UPC - Case	8711500599773	


Datasheet, 2023, September 4 data subject to change


## **MASTER SOX PSG**

## Dimensional drawing

Product	D (max)	C (max)
MASTER SOX PSG 35W BY22d T50 1SL/12	52 mm	311 mm

#### Lifetime

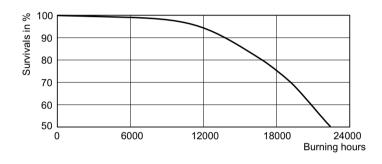



Life Expectancy Diagram - MASTER SOX PSG 35W BY22d T50 1SL/12

Lumen Maintenance Diagram - MASTER SOX PSG 35W BY22d T50 1SL/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.