



SON



SON 50W/220 I E27 1CT/24

High Pressure Sodium lamp with opalized ovoid outer bulb

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap base	E27 [E27]
Operating position	UNIVERSAL [Any or Universal (U)]
Flux measurement reference	Sphere
Life to 50% failures (nom.)	28,000 h
Light Technical	
Colour Code	220 [CCT of 2000K]
Luminous Flux	3,700 lm
Chromaticity Coordinate X (Nom)	0.54
Chromaticity Coordinate Y (Nom)	0.42
Correlated Colour Temperature	1900 K
Luminous efficacy (rated) (nom.)	70 lm/W
Colour rendering index (CRI)	-
Operating and Electrical	
Power Consumption	52.5 W
Voltage (nom.)	85 V
Voltage (nom.)	85 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Lamp Finish	Coated glass
Bulb shape	B70 [B 70 mm]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	12 mg
Mercury (Hg) content (nom.)	12 mg
Energy consumption kWh/1,000 hours	53 kWh
EPREL registration number	473381
Product Data	
Order product name	SON 50W/220 I E27 1CT/24
Full product name	SON 50W/220 I E27 1CT/24
Full EOC	871150018189330
Order code	18189330
Material no. (12 NC)	928150808828

Local order code	50SONI
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500181893
Numerator – packs per outer box	24


EAN/UPC - Case	8711500181909
----------------	---------------

Dimensional drawing

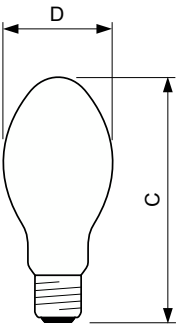


Product	D (max)	C (max)
SON 50W/220 I E27 1CT/24	71 mm	156 mm

Photometric data

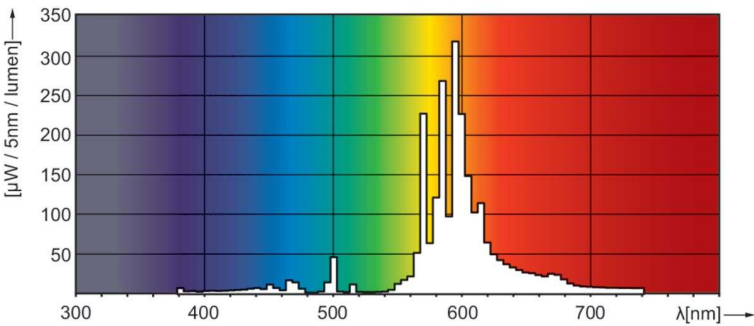


Spectral Power Distribution Colour - SON 50W/220 I E27 1CT/24

Lifetime

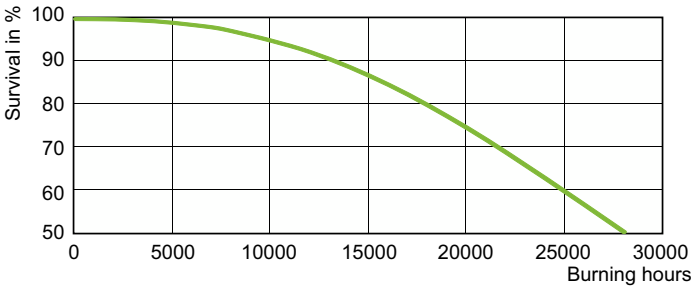

Life Expectancy Diagram - SON 50W/220 I E27 1CT/24

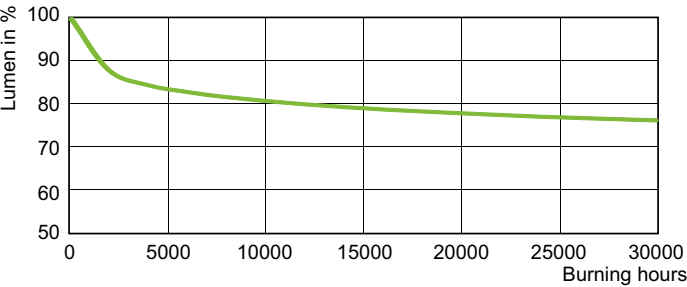

Lumen Maintenance Diagram - SON 50W/220 I E27 1CT/24

SON

