



MASTER SON APIA Plus Xtra

MASTER SON APIA Plus Xtra 400W E40 1SL/12

High Pressure Sodium lamp with opalized outer bulb, high output and longest reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Light technical	
Cap-Base	E40 [E40]	Color Code	- [Not Specified]
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Flux (Rated) (Nom)	55400 lm
Life to 5% Failures (Nom)	28000 h	Chromaticity Coordinate X (Nom)	0.525
Life To 10% Failures (Nom)	32000 h	Chromaticity Coordinate Y (Nom)	0.425
Life to 20% Failures (Nom)	36500 h	Correlated Color Temperature (Nom)	1950 K
Life to 50% Failures (Nom)	45000 h	Luminous Efficacy (rated) (Nom)	136.5 lm/W
System Description	External Ignitor	Color Rendering Index (Max)	25
LSF 2000 h Rated	100 %	LLMF 2000 h Rated	99 %
LSF 4000 h Rated	99 %	LLMF 4000 h Rated	98 %
LSF 6000 h Rated	99 %	LLMF 6000 h Rated	97 %
LSF 8000 h Rated	99 %	LLMF 8000 h Rated	96 %
LSF 12000 h Rated	99 %	LLMF 12000 h Rated	96 %
LSF 16000 h Rated	99 %	LLMF 16000 h Rated	95 %
LSF 20000 h Rated	99 %	LLMF 20000 h Rated	94 %
		Ratio Scotopic/Photopic Lumens	0.60

MASTER SON APIA Plus Xtra

Operating and electrical	
Power (Nom)	405.0 W
Lamp Current (EM) (Nom)	4.3 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	10 s
Voltage (Max)	120 V
Voltage (Min)	90 V
Voltage (Nom)	105 V
Controls and dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	5 min
Mechanical and housing	
Bulb Finish	Coated glass
Bulb Shape	BD90 [BD 90mm]
Approval and application	
Energy Efficiency Class	E
Mercury (Hg) Content (Nom)	20 mg

Energy Consumption kWh/1000 h	445 kWh
Luminaire design requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	250 °C
Cap-Base Temperature (Max)-DUP(do not use)	482 °F
Product data	
Full product code	872790092767200
Order product name	MASTER SON APIA Plus Xtra 400W E40 1SL/12
EAN/UPC - Product	8727900927672
Order code	92815119830
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	92815119830
Net Weight (Piece)	166.000 g
ILCOS Code	SE-400-H/E-E40

Dimensional drawing




MASTER SON APIA Plus Xtra 400W E40 1SL/12



Product	D (max)	C (max)
MASTER SON APIA Plus Xtra 400W E40 1SL/12	121.5 mm	290 mm

MASTER SON APIA Plus Xtra

Photometric data




LDLD_SON-APIA-Light distribution diagram

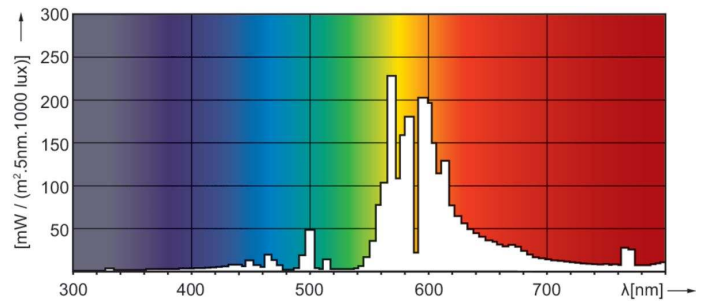


LDPO_SON-APIA-Spectral power distribution Colour

Lifetime

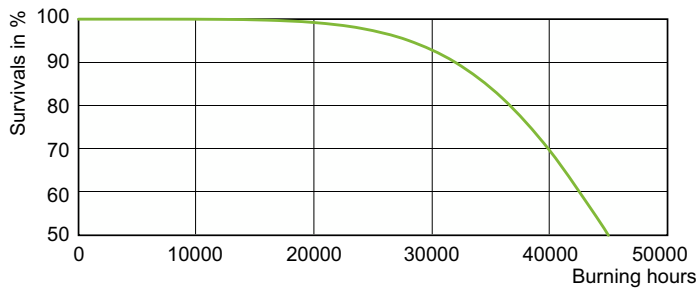

LDLE_SON-APIA_0004-Life expectancy diagram

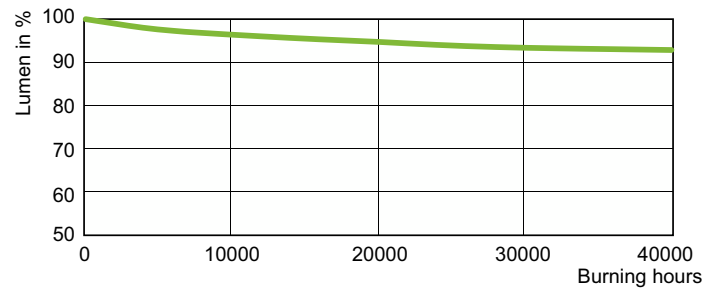

LDLM_SON-APIA_0003-Lumen maintenance diagram

