



MASTER SDW-T

MASTER SDW-T 50W/825 PG12-1 1SL/12

Range of high-efficiency, discharge lamps with warm colour to be used in open luminairs

Warnings and Safety

- · Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	PG12-1				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	15,000 hour(s)				
Useful Life (Nom)	10,000 hour(s)				
Light Technical					
Color Code	825 [CCT of 2500K]				
Luminous Flux	2,500 lm				
Color Designation	Golden White				
Chromaticity Coordinate X (Nom)	0.478				
Chromaticity Coordinate Y (Nom)	0.415				
Correlated Color Temperature (Nom)	2500 K				
Luminous Efficacy (rated) (Nom)	45.45 lm/W				
Color rendering index (CRI)	82				
Arc Length O (Nom)	16 mm				

Operating and Electrical	
Power Consumption	55.5 W
Voltage (Nom)	90 V
Voltage (Nom)	90 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Soft Glass
Bulb Shape	T31
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	7.6 mg
Mercury (Hg) Content (Nom)	7.6 mg
Energy Consumption kWh/1000 h	56 kWh


Datasheet, 2023, April 15 data subject to change

MASTER SDW-T

EPREL Registration Number	473396
Product Data	
Order product name	MASTER SDW-T 50W/825 PG12-1 1SL/12
Full product name	MASTER SDW-T 50W/825 PG12-1 1SL/12
Full product code	871150073403715
Order code	928153909227


Material Nr. (12NC)	928153909227
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500734037
Numerator - Packs per outer box	12
EAN/UPC - Case	8711500183149

Dimensional drawing




Product	D (max)	0	L	C (max)
MASTER SDW-T 50W/825 PG12-1 1SL/12	32 mm	15.4 mm	91 mm	149 mm

Photometric data






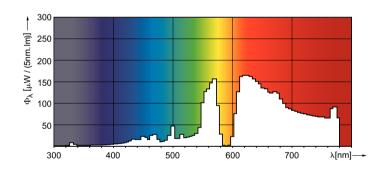


Spectral Power Distribution Colour - MASTER SDW-T 50W/825 PG12-1 1SL/12

MASTER SDW-T

Lifetime

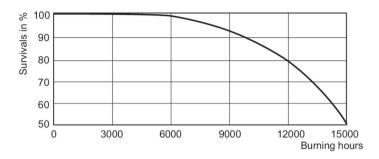

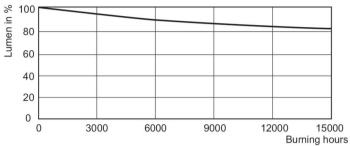

Life Expectancy Diagram - MASTER SDW-T 50W/825 PG12-1 1SL/12

Lumen Maintenance Diagram - MASTER SDW-T 50W/825 PG12-1 1SL/12

