



# MSR Gold™ SA Double Ended

## MSR Gold™ 700 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

General Information		Correlated Color Temperature (Nom)	
Cap-Base	SFC10-4		7500 K
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Efficacy (Rated) (Min)	62 lm/W
Life to 50% Failures (Nom)	750 hour(s)	Luminous Efficacy (rated) (Nom)	69 lm/W
		Color rendering index (CRI)	73
		Arc Length O (Nom)	4.0 mm
Light Technical		Operating and Electrical	
Color Code	- [Not Specified]	Power Consumption	700 W
Luminous Flux	48,000 lm	Lamp Current (Nom)	11.5 A
Chromaticity Coordinate X (Nom)	299		
Chromaticity Coordinate Y (Nom)	320		

# MSR Gold™ SA Double Ended

## Controls and Dimming

Dimmable No

## Product Data

Order product name MSR Gold 700 SA/2 DE 1CT/4  
 Full product name MSR Gold™ 700 SA/2 DE 1CT/4  
 Full product code 871829122123400  
 Order code 287136

Material Nr. (12NC) 928174705115


Numerator - Quantity Per Pack 1

EAN/UPC - Product/Case 8718291221234

Numerator - Packs per outer box 4


EAN/UPC - Case 8718291221241

## Dimensional drawing

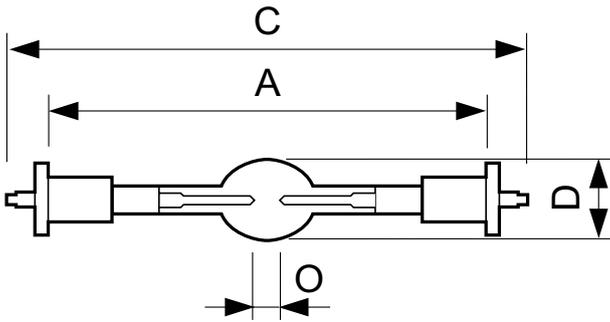

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold 700 SA/2 DE 1CT/4	3/4 inch	3/16 inch	4-1/2 inch	4-9/16 inch	4-9/16 inch	5-3/8 inch

## Photometric data

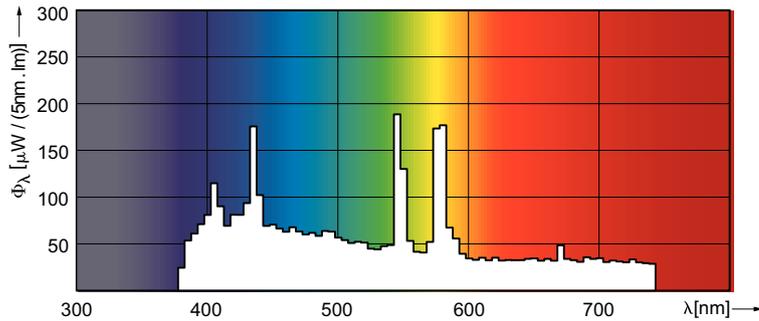

Spectral Power Distribution Colour - MSR Gold 700 SA/2 DE 1CT/4

