



# **MASTER HPI-T Plus**

## MASTER HPI-T Plus 250W/645 E40 1SL/12

Quartz metal halide lamps with clear outer bulb

#### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\cdot$  The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


General Information		Voltage (Nom)	128 V
Cap-Base	E40		
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]	Controls and Dimming	
Life to 50% Failures (Nom)	20,000 hour(s)	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	645 [CCT of 4500K]	Bulb Finish	Clear
Color Designation	Cool White (CW)	Bulb Shape	T46
Chromaticity Coordinate X (Nom)	365		
Chromaticity Coordinate Y (Nom)	377	Approval and Application	
Correlated Color Temperature (Nom)	4500 K	Mercury (Hg) Content (Nom)	36 mg
Luminous Efficacy (rated) (Nom)	79 lm/W	Energy Consumption kWh/1000 h	272 kWh
Color rendering index (CRI)	65		
Arc Length O (Nom)	29 mm	Product Data	
		Order product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
Operating and Electrical		Full product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
Power Consumption	247 W	Full product code	871150017989015
Voltage (Nom)	128 V	Order code	928481300098

## **MASTER HPI-T Plus**


Material Nr. (12NC)	928481300098
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500179890
Numerator - Packs per outer box	12


EAN/UPC - Case	8711500182975	

## Dimensional drawing



#### Photometric data







Light Distribution Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

 Product
 D (max)
 O
 L
 C (max)

 MASTER HPI-T Plus 250W/645 E40 ISL/12
 47 mm
 29 mm
 155 mm
 255 mm




Spectral Power Distribution Colour - MASTER HPI-T Plus 250W/645 E40 1SL/12

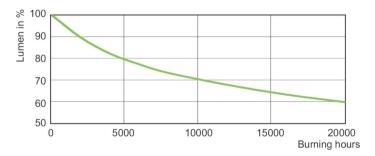

Lumen Maintenance Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

### Lifetime

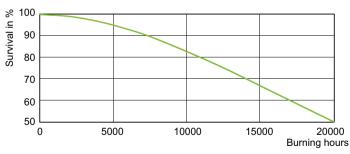

Life Expectancy Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

Datasheet, 2024, February 1

## **MASTER HPI-T Plus**



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, February 1 - data subject to change