



# **HPI-T High Wattage**

## HPI-T 1000W/543 E40 1SL/4

Quartz metal halide lamps with clear outer bulb

#### **Warnings and Safety**

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### Product data

General Information				
Cap-Base	E40 [E40]			
Operating Position	P [Parallel or Horizontal(HOR)]			
Life to 50% Failures (Nom)	12,000 hour(s)			
Light Technical				
Color Code	543 [CCT of 4300K]			
Color Designation	Cool White (CW)			
Chromaticity Coordinate X (Nom)	370			
Chromaticity Coordinate Y (Nom)	380			
Correlated Color Temperature (Nom)	4300 K			
Luminous Efficacy (rated) (Nom)	83 lm/W			

Color rendering index (CRI)	57		
Arc Length O (Nom)	80 mm		
Operating and Electrical			
Power Consumption	990 W		
Voltage (Nom)	130 V		
Voltage (Nom)	130 V		
Controls and Dimming			
Dimmable	No		


Datasheet, 2023, April 16 data subject to change

# **HPI-T High Wattage**

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T65 [T 65mm]
Approval and Application	
Mercury (Hg) Content (Nom)	86 mg
Energy Consumption kWh/1000 h	1089 kWh
Product Data	
Order product name	HPI-T 1000W/543 E40 1SL/4


Full product name	HPI-T 1000W/543 E40 1SL/4
Full product code	871150018373645
Order code	928482600096
Material Nr. (12NC)	928482600096
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500183736
Numerator - Packs per outer box	4
EAN/UPC - Case	8711500183743

## Dimensional drawing



Product	D (max)	0	L	C (max)
HPI-T 1000W/543 E40 1SL/4	66 mm	80 mm	240 mm	382 mm


### Photometric data

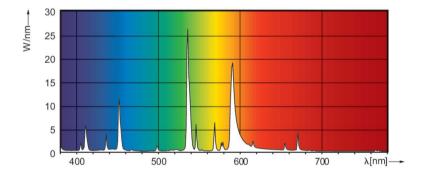


Spectral Power Distribution Colour - HPI-T 1000W/543 E40 1SL/4

## **HPI-T High Wattage**

#### Lifetime

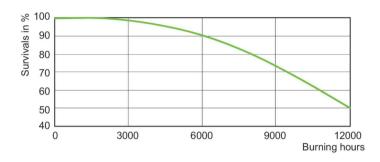

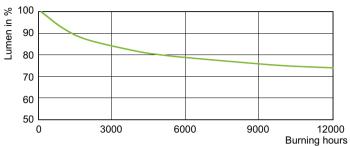

Life Expectancy Diagram - HPI-T 1000W/543 E40 1SL/4

Lumen Maintenance Diagram - HPI-T 1000W/543 E40 1SL/4



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.