



# MH-Sc

## MH 150W/637 E27 CO 1SL/24

Sodium Scandium Metal Halide Lamps consisting of a gasfilled glass bulb, which alternatively are clear or internal coated, and a quartz discharge tube (DT).

### Product data

General Information	
Cap-Base	E27 [ E27]
Operating Position	H [ Hanging or Base Up (BU)]
Life to 5% Failures (Nom)	2000 h
Life to 20% Failures (Nom)	5000 h
Life to 50% Failures (Nom)	10000 h
System Description	-
Light Technical	
Color Code	637 [ CCT of 3700K]
Luminous Flux (Rated) (Min)	11700 lm
Luminous Flux (Rated) (Nom)	13000 lm
Color Designation	Cool White (CW)
Lumen Maintenance 2000 h (Nom)	75 %
Lumen Maintenance 5000 h (Nom)	60 %
Chromaticity Coordinate X (Nom)	385
Chromaticity Coordinate Y (Nom)	390
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	87 lm/W
Color Rendering Index (Nom)	65
Operating and Electrical	
Power (Rated) (Max)	- W
Power (Rated) (Min)	- W
Power (Rated) (Nom)	150.0 W

Lamp Current Run-Up (Max)	3 A
Lamp Current (EM) (Nom)	1.8 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2700 V
Ignition Supply Voltage (Min)	198 V
Voltage (Max)	105 V
Voltage (Min)	85 V
Voltage (Nom)	95 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Coated glass

Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	10.2 mg
Energy Consumption kWh/1000 h	165 kWh


Luminaire Design Requirements	
Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C

# MH-NaSc

Product Data	
Full product code	871150021212200
Order product name	MH 150W/637 E27 CO 1SL/24
EAN/UPC - Product	8711500212122
Order code	928488600092
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	24
Material Nr. (12NC)	928488600092
Net Weight (Piece)	0.070 kg


## Dimensional drawing




MH 150W E27 CO

Product	D (max)	C (max)
MH 150W/637 E27 CO 1SL/24	56 mm	141 mm

## Lifetime

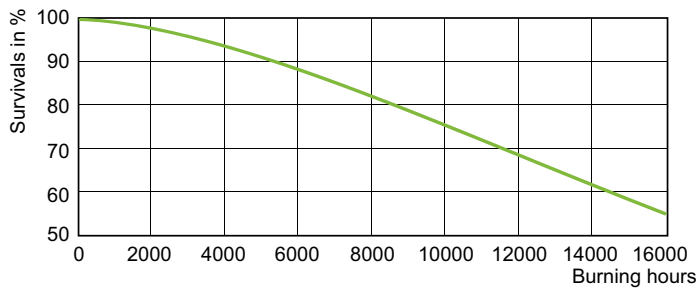

MH 100W, 150W /637 Coated

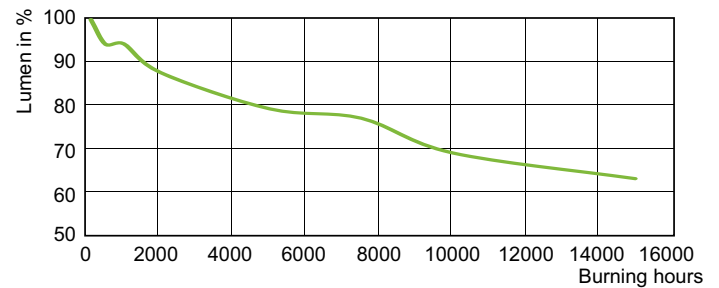

MH 150W /637, /640

