



# ML

## ML 160W E27 220-230V SG 1CT/24

Mixed Light lamps

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	E27
Operating Position	VBU/VBD30 [Vertical or Base Up/Base Down +/-30D]
Life to 50% Failures (Nom)	13,000 hour(s)
Light Technical	
Chromaticity Coordinate X (Nom)	399
Chromaticity Coordinate Y (Nom)	380
Correlated Color Temperature (Nom)	3600 K
Luminous Efficacy (rated) (Nom)	19 lm/W
Color rendering index (CRI)	63
Operating and Electrical	
Power Consumption	165.0 W
Voltage (Nom)	225 V
Voltage (Nom)	225 V
Controls and Dimming	
Dimmable	No


Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Soft Glass
Bulb Shape	E75
Approval and Application	
Mercury (Hg) Content (Nom)	12 mg
Energy Consumption kWh/1000 h	181 kWh
Product Data	
Order product name	ML 160W E27 220-230V SG 1CT/24
Full product name	ML 160W E27 220-230V SG 1CT/24
Full product code	692059024698230
Order code	928601008988
Material Nr. (12NC)	928601008988
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6920590246982
Numerator - Packs per outer box	24
EAN/UPC - Case	56920590246987

Dimensional drawing

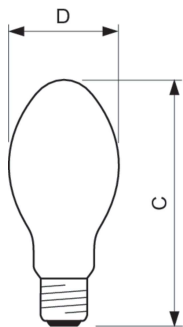


Product	D (max)	C (max)
ML 160W E27 220-230V SG 1CT/24	76 mm	172 mm

Photometric data

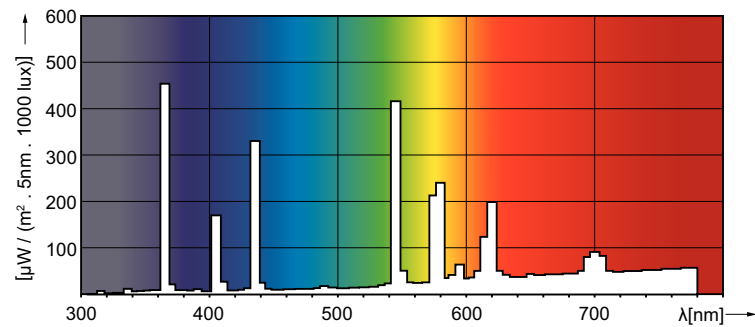


Spectral Power Distribution Colour - ML 160W E27 220-230V SG 1CT/24

Lifetime

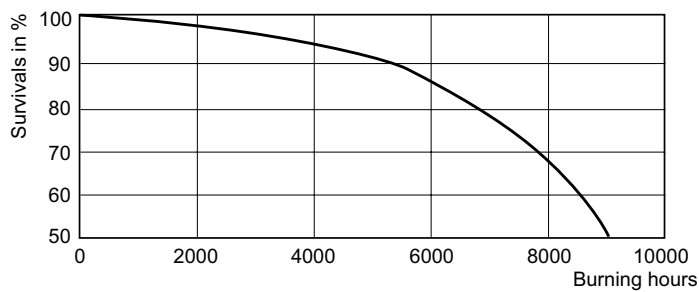

Life Expectancy Diagram - ML 160W E27 220-230V SG 1CT/24

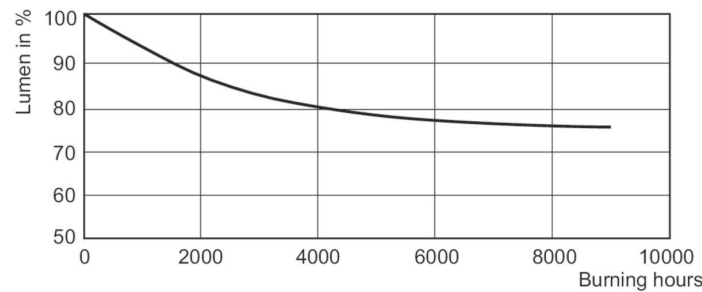

Lumen Maintenance Diagram - ML 160W E27 220-230V SG 1CT/24

