Lighting

PHILIPS



MASTERColour CDM-T Elite MW

MASTERC CDM-TMW Elite 210W/942 1CT

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | Correlated Color Temperature (Nom) | 4200 K | |
|---------------------------------|----------------------------------|------------------------------------|----------|--|
| Cap-Base | PGZ18 | Luminous Efficacy (Rated) (Min) | 98 lm/W | |
| Operating Position | UNIVERSAL [Any or Universal (U)] | Luminous Efficacy (rated) (Nom) | 108 lm/W | |
| Flux measurement reference | Sphere | Color rendering index (CRI) | 92 | |
| Life to 50% Failures (Nom) | 30,000 hour(s) | | | |
| | | Operating and Electrical | | |
| Light Technical | | Power Consumption | 210.0 W | |
| Color Code | 942 [CCT of 4200K] | Voltage (Nom) | 98 V | |
| Luminous Flux | 23,000 lm | Voltage (Nom) | 98 V | |
| Color Designation | Cool White (CW) | | | |
| Saturated Red (R9) | 80 | Controls and Dimming | | |
| Chromaticity Coordinate X (Nom) | 0.371 | Dimmable | No | |
| Chromaticity Coordinate Y (Nom) | 0.366 | | | |

MASTERColour CDM-T Elite MW

| Mechanical and Housing | |
|-------------------------------|---------|
| Bulb Finish | Clear |
| Bulb Shape | TMW28 |
| | |
| Approval and Application | |
| Energy Efficiency Class | F |
| Mercury (Hg) Content (Max) | 23 mg |
| Energy Consumption kWh/1000 h | 210 kWh |
| EPREL Registration Number | 473298 |


| Full product name | MASTERC CDM-TMW Elite 210W/942 1CT | | |
|---------------------------------|------------------------------------|--|--|
| Full product code | 871829113952200 | | |
| Order code | 928601164931 | | |
| Material Nr. (12NC) | 928601164931 | | |
| Numerator - Quantity Per Pack | 1 | | |
| EAN/UPC - Product/Case | 8727900801804 | | |
| Numerator - Packs per outer box | 12 | | |
| EAN/UPC - Case | 8718291139539 | | |
| | | | |

Product Data


Or


| Order product name | MASTERC CDM-TMW Elite 210W/942 1CT |
|--------------------|------------------------------------|
| | |

Dimensional drawing




Photometric data






Light Distribution Diagram - MASTERC CDM-TMW Elite 210W/942 1CT


| Product | D (max) | D | D | C (max) | с |
|------------------------------------|---------|----------|-------|---------|--------|
| MASTERC CDM-TMW Elite 210W/942 1CT | 29 mm | 1.1 inch | 28 mm | 188 mm | 186 mm |

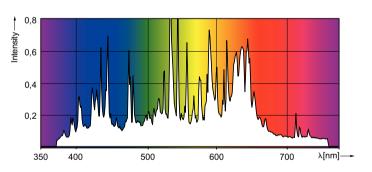



MASTERColour CDM-T Elite MW

Lifetime

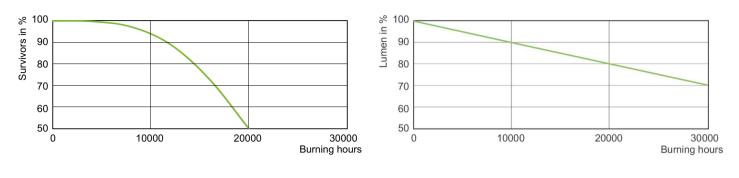

Life Expectancy Diagram - MASTERC CDM-TMW Elite 210W/942 1CT

Lumen Maintenance Diagram - MASTERC CDM-TMW Elite 210W/942 1CT



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.