



# MASTERColour CDM-T Elite MW

## CDM-TP MW 210W/930 PGZX18.1CT/12

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information			
Cap-Base	PGZX18	Chromaticity Coordinate Y (Nom)	0.398
Operating Position	UNIVERSAL [Any or Universal (U)]	Correlated Color Temperature (Nom)	3000 K
Features	Protected (P)	Luminous Efficacy (Rated) (Min)	101 lm/W
Flux measurement reference	Sphere	Luminous Efficacy (rated) (Nom)	111 lm/W
Life to 50% Failures (Nom)	30,000 hour(s)	Color rendering index (CRI)	90
		Arc Length O (Nom)	12.1 mm
Light Technical		Operating and Electrical	
Color Code	930 [CCT of 3000K]	Power Consumption	210.0 W
Luminous Flux	23,300 lm	Voltage (Nom)	100 V
Color Designation	Warm White (WW)	Voltage (Nom)	100 V
Saturated Red (R9)	50		
Chromaticity Coordinate X (Nom)	0.434		

MASTERColour CDM-T Elite MW

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T12
Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	23.7 mg
Energy Consumption kWh/1000 h	210 kWh
EPREL Registration Number	473299




Product Data	
Order product name	CDM-TP MW 210W/930 PGZX18.1CT/12
Full product name	CDM-TP MW 210W/930 PGZX18.1CT/12
Full product code	871829113954600
Order code	13954600
Material Nr. (12NC)	928601167031
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900862096
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291139553

Dimensional drawing

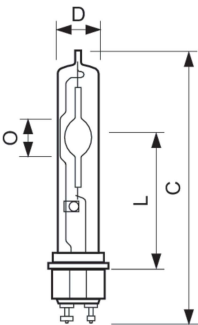

Product	D	D	C
CDM-TP MW 210W/930 PGZX18.1CT/12	1.5 inch	38 mm	193 mm

Photometric data

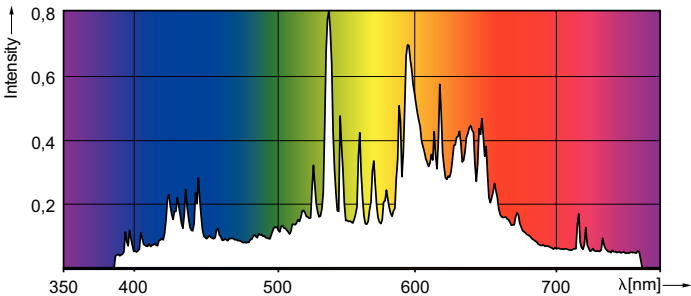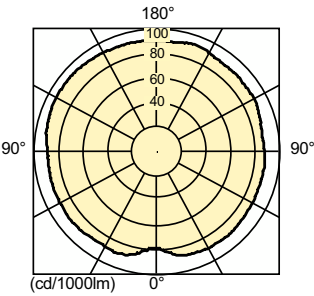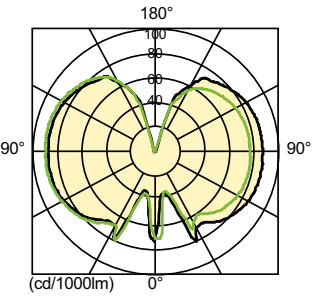


Light Distribution Diagram - CDM-TP MW 210W/930 PGZX18.1CT/12


Spectral Power Distribution Colour - CDM-TP MW 210W/930 PGZX18.1CT/12

MASTERC colour CDM-T Elite MW

Lifetime

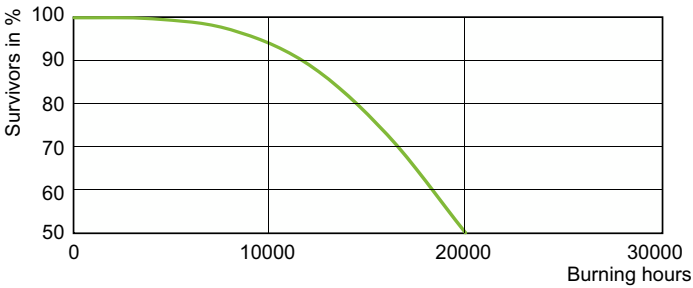

Life Expectancy Diagram - CDM-TP MW 210W/930 PGZX18.1CT/12

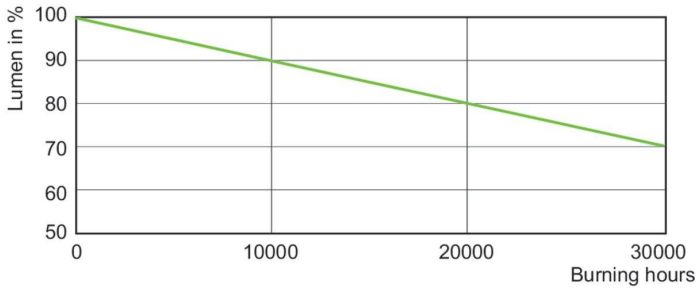

Lumen Maintenance Diagram - CDM-TP MW 210W/930 PGZX18.1CT/12

