



PAR38 LED Single Optic Lamps with AirFlux Technology

17PAR38/S15 3000 DIM AF SO 6/1

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information		LLMF At End Of Nominal Lifetime (Nom)	
Cap-Base	E26 [Single Contact Medium Screw]		70 %
Nominal Lifetime (Nom)	25000 h	Operating and Electrical	
Switching Cycle	50000X	Input Frequency	60 Hz
Technical Type	17-100W	Power (Rated) (Nom)	17 W
Light Technical		Lamp Current (Nom)	167 mA
Color Code	830 [CCT of 3000K]	Starting Time (Nom)	0.5 s
Beam Angle (Nom)	15 °	Warm Up Time to 60% Light (Nom)	0.5 s
Luminous Flux (Nom)	1250 lm	Power Factor (Nom)	0.85
Luminous Flux (Rated) (Nom)	1250 lm	Voltage (Nom)	120 V
Luminous Intensity (Nom)	10500 cd	Temperature	
Color Designation	White (WH)	T-Case Maximum (Nom)	89 °C
Rated Beam Angle	15 °	Controls and Dimming	
Correlated Color Temperature (Nom)	3000 K	Dimmable	Yes
Luminous Efficacy (rated) (Nom)	74 lm/W	Approval and Application	
Color Consistency	<6	Energy Efficiency Label (EEL)	Not applicable
Color Rendering Index (Nom)	80		

PAR38 LED Single Optic Lamps with AirFlux Technology


Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star
Product Data	
Order product name	120V PAR38 17W 15D 3000K 1200 D AF SO
EAN/UPC - Product	046677435363
Order code	435362

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001113204
Net Weight (Piece)	0.001 kg

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005



Dimensional drawing



Par38 CL 120V 17W-120W 15D 3000K E26 D

Product	D	C
120V PAR38 17W 15D 3000K 1200 D AF SO	120.3 mm	130.5 mm


Photometric data

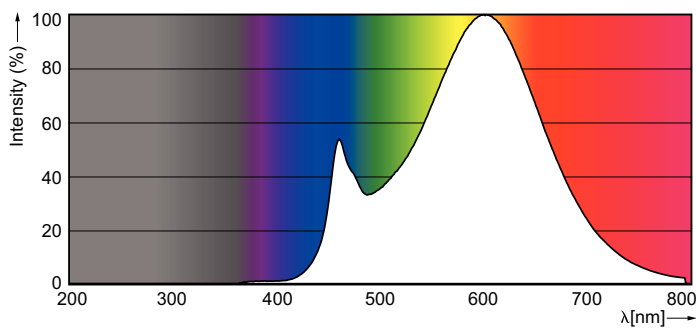

LEDspot, PAR38 12W 3000K 15D

PAR38 LED Single Optic Lamps with AirFlux Technology

Photometric data



Product Parameters 41 Photo Lighting 41 Page 17

LEDspot, PAR38 12W 3000K 15D

