



# MASTER LEDtube EM/ Mains T8

## MAS LEDtube 1200mm HO 16W830 T8 RS

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

### Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

### Product data

| General Information |                                 |
|---------------------|---------------------------------|
| Cap-Base            | G13 [Medium Bi-Pin Fluorescent] |
| Nominal lifetime    | 50,000 hour(s)                  |
| Switching Cycle     | 200,000                         |
| Lighting Technology | LED                             |
| EU RoHS compliant   | Yes                             |

| Light Technical                    |                    |
|------------------------------------|--------------------|
| Color Code                         | 830 [CCT of 3000K] |
| Beam Angle (Nom)                   | 160 degree(s)      |
| Luminous Flux                      | 2,000 lm           |
| Color Designation                  | White (WH)         |
| Correlated Color Temperature (Nom) | 3000 K             |
| Color Consistency                  | <6                 |

|                                       |      |
|---------------------------------------|------|
| Color rendering index (CRI)           | 80   |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |


| Operating and Electrical  |             |
|---------------------------|-------------|
| Line Frequency            | 50 to 60 Hz |
| Input Frequency           | 50 to 60 Hz |
| Power Consumption         | 16 W        |
| Lamp Current (Max)        | 77 mA       |
| Lamp Current (Min)        | 68 mA       |
| Starting Time (Nom)       | 0.5 s       |
| Warm-up time to 60% light | 0.5 s       |
| Power Factor (Fraction)   | 0.9         |
| Voltage (Nom)             | 220-240 V   |

MASTER LEDtube EM/Mains T8

|                              |                                                      |
|------------------------------|------------------------------------------------------|
| Temperature                  |                                                      |
| Ambient temperature range    | -20 °C to 35 °C                                      |
| T-Case Maximum (Nom)         | 55 °C                                                |
| Controls and Dimming         |                                                      |
| Dimmable                     | No                                                   |
| Mechanical and Housing       |                                                      |
| Product Length               | 1,200 mm                                             |
| Approval and Application     |                                                      |
| Energy Saving Product        | Yes                                                  |
| Suitable For Accent Lighting | No                                                   |
| Approval Marks               | TUV CE marking RoHS compliance KEMA Keur certificate |


|                                 |                                    |
|---------------------------------|------------------------------------|
| Energy Consumption kWh/1000 h   | 16 kWh                             |
| Product Data                    |                                    |
| Order product name              | MAS LEDtube 1200mm HO 16W830 T8 RS |
| Full product name               | MAS LEDtube 1200mm HO 16W830 T8 RS |
| Full product code               | 871869642198700                    |
| Order code                      | 929001126102                       |
| Material Nr. (12NC)             | 929001126102                       |
| Numerator - Quantity Per Pack   | 1                                  |
| EAN/UPC - Product/Case          | 8718696421987                      |
| Numerator - Packs per outer box | 10                                 |
| EAN/UPC - Case                  | 8718696421994                      |

Dimensional drawing

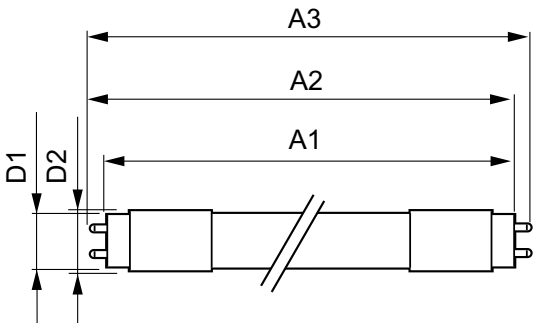


| Product                            | D1      | D2    | A1         | A2         | A3         |
|------------------------------------|---------|-------|------------|------------|------------|
| MAS LEDtube 1200mm HO 16W830 T8 RS | 25.7 mm | 28 mm | 1,198.2 mm | 1,205.3 mm | 1,212.4 mm |

Photometric data



Light Distribution Diagram - MAS LEDtube 1200mm HO 16W830 T8 RS



Spectral Power Distribution Colour - MAS LEDtube 1200mm HO 16W830 T8 RS

## MASTER LEDtube EM/Mains T8

