



LED PAR38

120V PAR38 13W 35D 3000K 900 D SO

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

| General Information | | |
|---------------------------------------|-----------------------------------|--|
| Cap-Base | E26 [Single Contact Medium Screw] | |
| Nominal lifetime | 25,000 hour(s) | |
| Switching Cycle | 50,000 | |
| Lighting Technology | LED | |
| EU RoHS compliant | Yes | |
| | | |
| Light Technical | | |
| Color Code | 830 [CCT of 3000K] | |
| Beam Angle (Nom) | 35 degree(s) | |
| Luminous Flux | 950 lm | |
| Luminous Intensity (Nom) | 2,650 cd | |
| Color Designation | White (WH) | |
| Correlated Color Temperature (Nom) | 3000 K | |
| Luminous Efficacy (rated) (Nom) | 73 lm/W | |
| Color Consistency | <6 | |
| Color rendering index (CRI) | 80 | |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % | |
| | | |
| Operating and Electrical | | |
| Line Frequency | 60 Hz | |
| Input Frequency | 60 Hz | |
| Power Consumption | 13 W | |
| Lamp Current (Nom) | 128 mA | |

| Starting Time (Nom) | 0.5 s | |
|-------------------------------|-----------------------------------|--|
| Warm-up time to 60% light | 0.5 s | |
| Power Factor (Fraction) | 0.85 | |
| Voltage (Nom) | 120 V | |
| | | |
| Temperature | | |
| T-Case Maximum (Nom) | 80 °C | |
| | | |
| Controls and Dimming | | |
| Dimmable | Yes | |
| | | |
| Mechanical and Housing | | |
| Bulb Shape | PAR38 [PAR 4.75 inch/121mm] | |
| | | |
| Approval and Application | | |
| Suitable For Accent Lighting | Yes | |
| Energy Certifications | Energy Star | |
| | | |
| Product Data | | |
| Order product name | 120V PAR38 13W 35D 3000K 900 D SO | |
| Full product name | 120V PAR38 13W 35D 3000K 900 D SO | |
| Order code | 929001132204 | |
| Material Nr. (12NC) | 929001132204 | |
| Numerator - Quantity Per Pack | 1 | |

Datasheet, 2023, December 6 data subject to change


LED PAR38


| EAN/UPC - Product/Case | 046677454753 |
|---------------------------------|----------------|
| Numerator - Packs per outer box | 6 |
| EAN/UPC - Case | 50046677454758 |

Dimensional drawing

| Product | D | С |
|-----------------------------------|--------|--------|
| 120V PAR38 13W 35D 3000K 900 D SO | 120 mm | 131 mm |


Photometric data

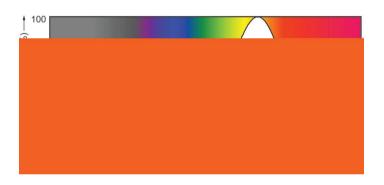



Spectral Power Distribution Colour - 120V PAR38 13W 35D 3000K 900 D SO

Light Distribution Diagram - 120V PAR38 13W 35D 3000K 900 D SO



General uniform lighting - 120V PAR38 13W 35D 3000K 900 D SO

LED PAR38



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.