



MASTER VALUE LEDs

pot LV

MASTER LEDspotLV VLE D6.3-35W 840MR16 24DRN

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	24 degree(s)
Luminous Flux	410 lm
Luminous Intensity (Nom)	1,800 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	65.00 lm/W

MASTER VALUE LEDspot LV

Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	410 lm

Operating and Electrical

Power Consumption	6.3 W
Lamp Current (Nom)	800 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	instant full light s
Power Factor (Fraction)	0.7
Voltage (Nom)	12 V

Temperature

T-Case Maximum (Nom)	100 °C
----------------------	--------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Bulb Shape	MR16 [2inch/50mm]
------------	-------------------


Approval and Application

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	7 kWh

Product Data

Order product name	MAS LEDspotLV VLE D6.3-35W 840MR16 24DRN
Full product name	MASTER LEDspotLV VLE D6.3-35W 840MR16 24DRN
Full product code	871869649025900
Order code	49025900
Material Nr. (12NC)	929001151902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696490259
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696490266



Dimensional drawing



Product	D	C
MAS LEDspotLV VLE D6.3-35W 840MR16 24DRN	50.5 mm	50.5 mm

MASTER VALUE LEDspot LV

Photometric data

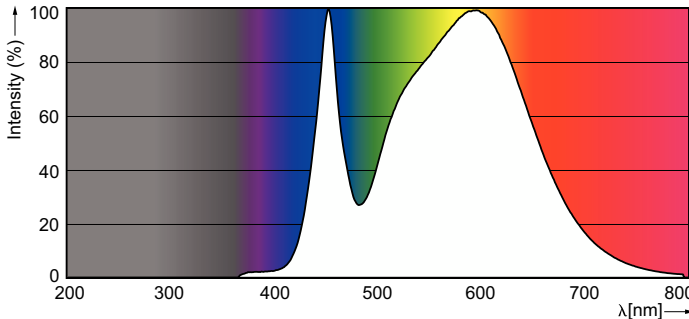

Light Distribution Diagram - MAS LEDspotLV VLE D6.3-35W 840MR16 24DRN

Spectral Power Distribution Colour - MAS LEDspotLV VLE D6.3-35W 840MR16 24DRN

