PHILIPS Lighting

MASTER LEDtube InstantFit HF T8

MASTER LEDtube HF 1200mm HO 18W840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. The MASTER LEDtube Performance is the ideal solution for customers which have higher light requirements and the want to maximize value over lifetime.(need the longest lifetime). Full energy savings and TCO benefits.

Warnings and Safety

• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	2,100 lm
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color rendering index (CRI)	83


LLMF At End Of Nominal Lifetime (Nom) 70 %		
Operating and Electrical		
Line Frequency	25000-80000 Hz	
Input Frequency	25000-80000 Hz	
Power Consumption	18 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	Instant full light s	
Power Factor (Fraction)	0.9	
Voltage (Nom)	50-100 V	
Temperature		
Ambient temperature range	-20 °C to 35 °C	
T-Case Maximum (Nom)	40 °C	

MASTER LEDtube InstantFit HF T8

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	1,200 mm
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	No
Approval Marks	CE marking RoHS compliance KEMA Keur
	certificate
Energy Consumption kWh/1000 h	22 kWh

Product Data	
Order product name	MAS LEDtube HF 1200mm HO 18W840 T8
Full product name	MASTER LEDtube HF 1200mm HO 18W840 T8
Full product code	871869647125800
Order code	47125800
Material Nr. (12NC)	929001155102
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696471258
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696471265


Dimensional drawing



Product D1 D2 A1 A2 A3 MAS LEDtube HF 1200mm HO 25.6 mm 28 mm 1,198.0 mm 1,205.0 mm 1,212.0 mm 18W840 T8 5

Photometric data

1200 / 1800/ 1200

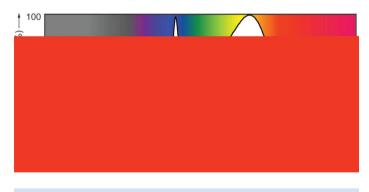

Light Distribution Diagram - MAS LEDtube HF 1200mm HO 18W840 T8

Spectral Power Distribution Colour - MAS LEDtube HF 1200mm HO 18W840 T8

MASTER LEDtube InstantFit HF T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 29 - data subject to change