



Standard LED bulbs

LEDBulb 6-50W E27 830 220-240V 1BL/4

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

Product data


General Information		Lamp Current (Nom)		55 mA
Cap-Base	E27 [E27]	Starting Time (Nom)		0.5 s
Nominal lifetime	15,000 hour(s)	Warm-up time to 60% light		0.5 s
Switching Cycle	50,000	Power Factor (Fraction)		0.5
Lighting Technology	LED	Voltage (Nom)		220-240 V
EU RoHS compliant	Yes			
Light Technical		Temperature		
Color Code	830 [CCT of 3000K]	T-Case Maximum (Nom)		75 °C
Beam Angle (Nom)	150 degree(s)	Controls and Dimming		
Luminous Flux	470 lm	Dimmable		No
Color Designation	White (WH)	Mechanical and Housing		
Correlated Color Temperature (Nom)	3000 K	Bulb Finish		Frosted
Luminous Efficacy (rated) (Nom)	78.00 lm/W	Bulb Shape		A60 [A 60mm]
Color Consistency	<6			
Color rendering index (CRI)	80	Approval and Application		
LLMF At End Of Nominal Lifetime (Nom)	70 %	Energy Consumption kWh/1000 h		6 kWh
Operating and Electrical		Product Data		
Line Frequency	50 to 60 Hz	Order product name		LEDBulb 6-50W E27 830 220-240V 1BL/4
Input Frequency	50 to 60 Hz	Full product name		LEDBulb 6-50W E27 830 220-240V 1BL/4
Power Consumption	6 W			

Standard LED bulbs

Full product code	871869654556000
Order code	929001162071
Material Nr. (12NC)	929001162071
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696545560


Numerator - Packs per outer box	4
EAN/UPC - Case	8718696545577

Dimensional drawing



Product	D	C
LEDBulb 6-50W E27 830 220-240V 1BL/4	60 mm	110 mm

Photometric data

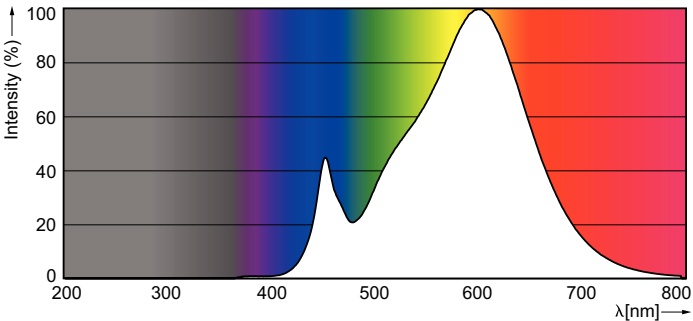

Light Distribution Diagram - LEDBulb 6-50W E27 830 220-240V 1BL/4

Spectral Power Distribution Colour - LEDBulb 6-50W E27 830 220-240V 1BL/4

