



# MASTER LEDspot LV AR111

# MAS LEDspotLV D 11-50W 930 AR111 24D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV AR111 is an ideal retrofit solution for spot and general lighting applications in the hospitality and retail industry. It is particularly suitable for general lighting where the light is on all the time, such as creative accent lighting applications in shops, restaurants, hotels, and especially for galleries, exhibitions and museums. The robustly designed MASTER LEDspot LV AR111 offers various beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. MASTER LEDspot LV AR111 delivers huge energy savings and minimises maintenance cost without any reduction in brightness.

#### **Product data**

General Information	
Cap-Base	G53 [G53]
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	24 degree(s)
Luminous Flux	640 lm
Luminous Intensity (Nom)	3,000 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	58.18 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	580 lm
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz
Power Consumption	11 W
Lamp Current (Nom)	1,300 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	instant full light s


Datasheet, 2023, April 29 data subject to change

# **MASTER LEDspot LV AR111**

Power Factor (Fraction)	0.7
Voltage (Nom)	12 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	AR111
Approval and Application	
Suitable For Accent Lighting	Yes


Energy Consumption kWh/1000 h	13 kWh	
Product Data		
Order product name	MAS LEDspotLV D 11-50W 930 AR111 24D	
Full product name	MAS LEDspotLV D 11-50W 930 AR111 24D	
Full product code	871869651510500	
Order code	929001169908	
Material Nr. (12NC)	929001169908	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8718696515105	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8718696515112	

## Dimensional drawing

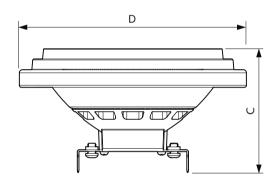


Product	D	С
MAS LEDspotLV D 11-50W 930 AR111 24D	111 mm	62 mm

### Photometric data








Light Distribution Diagram - MAS LEDspotLV D 11-50W 930 AR111 24D


# **MASTER LEDspot LV AR111**


#### Photometric data



Spectral Power Distribution Colour - MAS LEDspotLV D 11-50W 930 AR111 24D

#### Lifetime

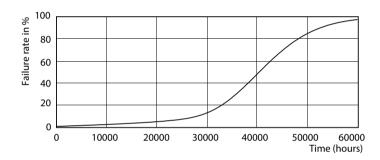

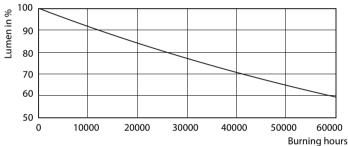

Life Expectancy Diagram - MAS LEDspotLV D 11-50W 930 AR111 24D

Lumen Maintenance Diagram - MAS LEDspotLV D 11-50W 930 AR111 24D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.