



Standard LED bulbs

LEDBulb 9W E27 3000K W A19 3PF/4 MX

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

Product data

General Information		Starting Time (Nom)		0.5 s
Cap-Base	E27 [E27]	Warm-up time to 60% light		0.5 s
Nominal lifetime	25,000 hour(s)	Power Factor (Fraction)		0.92
Switching Cycle	50,000	Voltage (Nom)		100-240 V
Lighting Technology	LED			
EU RoHS compliant	Yes			
Light Technical		Temperature		
Color Code	830 [CCT of 3000K]	T-Case Maximum (Nom)		80 °C
Beam Angle (Nom)	150 degree(s)	Controls and Dimming		
Luminous Flux	806 lm	Dimmable		No
Color Designation	White (WH)			
Correlated Color Temperature (Nom)	3000 K	Mechanical and Housing		
Luminous Efficacy (rated) (Nom)	89.00 lm/W	Bulb Finish		Frosted
Color Consistency	ANSI	Bulb Shape		A19 [A 19mm]
Color rendering index (CRI)	80			
LLMF At End Of Nominal Lifetime (Nom)	70 %			
Operating and Electrical		Product Data		
Line Frequency	50 to 60 Hz	Order product name		LEDBulb 9W E27 3000K W A19 3PF/4 MX
Input Frequency	50 to 60 Hz	Full product name		LEDBulb 9W E27 3000K W A19 3PF/4 MX
Power Consumption	9 W	Full product code		871869679359600
		Order code		929001195393
		Material Nr. (12NC)		929001195393
		Numerator - Quantity Per Pack		1


Standard LED bulbs

EAN/UPC - Product/Case	8718696793596
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696793602


Dimensional drawing

Product	D	C
LEDBulb 9W E27 3000K W A19 3PF/4 MX	60 mm	110 mm

Photometric data



Light Distribution Diagram - LEDBulb 9W E27 3000K W A19 3PF/4 MX

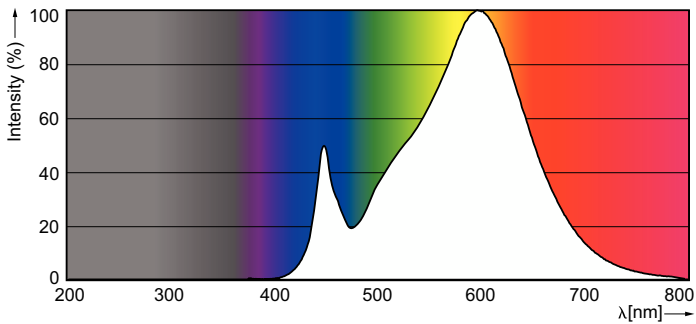

Spectral Power Distribution Colour - LEDBulb 9W E27 3000K W A19 3PF/4 MX

