



CorePro Plastic LEDcandles & lusters

Corepro lustre ND 5.5-40W E14 840 P45 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14 [E14]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	520 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	94.55 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
	-

Power Consumption	5.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	P45 [P 45mm]
Approval and Application	
Energy Consumption kWh/1000 h	6 kWh


Datasheet, 2023, May 1 data subject to change

CorePro Plastic LEDcandles & lusters

EyeComfort	Yes
Product Data	
Order product name	Corepro lustre ND 5.5-40W E14 840 P45 CL
Full product name	Corepro lustre ND 5.5-40W E14 840 P45 CL
Full product code	871869654344300
Order code	54344300


Material Nr. (12NC)	929001206102
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696543443
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696543450


Dimensional drawing



Product	D	С
Corepro lustre ND 5.5-40W E14 840 P45 CL	45 mm	88 mm


Photometric data





General uniform lighting - Corepro lustre ND 5.5-40W E14 840 P45 CL


Light Distribution Diagram - Corepro lustre ND 5.5-40W E14 840 P45 CL

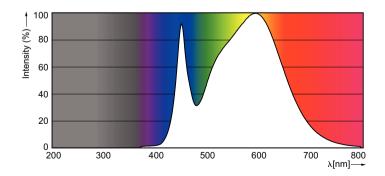


Spectral Power Distribution Colour - Corepro lustre ND 5.5-40W E14 840 P45 CL

CorePro Plastic LEDcandles & lusters

Lifetime

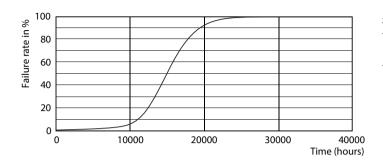

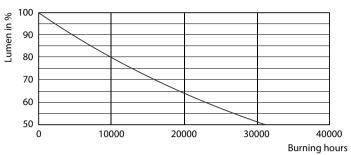

Life Expectancy Diagram - Corepro lustre ND 5.5-40W E14 840 P45 CL

Lumen Maintenance Diagram - Corepro lustre ND 5.5-40W E14 840 P45 CL

