



# MASTER VALUE LEDspot MV

## MAS LEDspotMV VLE CLA DT 5-50W GU10 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	822-827 [tunable warm white]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	345 lm

Luminous Intensity (Nom)	600 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	69.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	345 lm
Operating and Electrical	
Line Frequency	50 to 60 Hz

MASTER VALUE LEDspot MV

Input Frequency	50 to 60 Hz
Power Consumption	5 W
Lamp Current (Nom)	28 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	1 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------

Approval and Application

Energy Saving Product	Yes
-----------------------	-----

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh


Product Data

Order product name	MAS LEDspotMV VLE CLA DT 5-50W GU10 36D
Full product name	MAS LEDspotMV VLE CLA DT 5-50W GU10 36D
Full product code	871869666762000
Order code	929001278602
Material Nr. (12NC)	929001278602
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696667620
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696667637


Dimensional drawing

Product	D	C
MAS LEDspotMV VLE CLA DT 5-50W GU10 36D	50 mm	53 mm

Photometric data

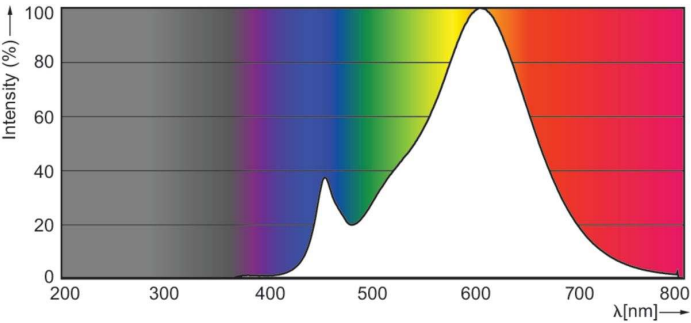


Spectral Power Distribution Colour - MAS LEDspotMV VLE CLA DT 5-50W GU10 36D



General uniform lighting - MAS LEDspotMV VLE CLA DT 5-50W GU10 36D

MASTER VALUE LEDspot MV

Photometric data



Light Distribution Diagram - MAS LEDspotMV VLE CLA DT 5-50W GU10 36D

