



MASTER VALUE LEDs pot LV

MASTER LED spot VLE D 7-50W MR16 830 36D

Philips MASTER VALUE MR16 is the series of Low Voltage (12 VAC) Halogen MR16 replacements. Not only does it employ Philips' patented solution to guarantee the broadest possible compatibility with standard 12 V Halogen electronic transformers, it also delivers beam intensity which is equivalent to the 50 W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact fit with Halogen lamps.)

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- · Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap base	GU5.3 [GU5.3]
Nominal lifetime	25,000 h
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Colour Code	830 [CCT of 3000K]
Beam angle (nom.)	36 degree(s)
Luminous Flux	630 lm
Luminous intensity (nom.)	1,700 cd
Colour designation	White (WH)

Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	90.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	630 lm
Operating and Electrical	
Power Consumption	7 W
Lamp current (nom.)	760 mA
Wattage equivalent	50 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s


Datasheet, 2023, April 29 data subject to change

MASTER VALUE LEDspot LV

Power Factor (Fraction)	0.8	
Voltage (nom.)	ac Electronic 12 V	
Temperature		
T-Case maximum (nom.)	105 °C	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Bulb shape	MR16 [2 inch/50 mm]	
Approval and Application		
Suitable for accent lighting	Yes	


Energy consumption kWh/1,000 hours	8 kWh
Product Data	
Order product name	MAS LED spot VLE D 7-50W MR16 830 36D
Full product name	MASTER LED spot VLE D 7-50W MR16 830 36D
Full EOC	871869670837800
Order code	70837800
Material no. (12 NC)	929001326602
SAP numerator – quantity per pack	1
EAN/UPC — Product/Case	8718696708378
Numerator – packs per outer box	10
EAN/UPC - Case	8718696708385

Dimensional drawing




Product	D	С
MAS LED spot VLE D 7-50W MR16 830 36D	50.5 mm	49.5 mm

Photometric data






Accent Lighting Spots - MAS LED spot VLE D 7-50W MR16 830 36D



Light Distribution Diagram - MAS LED spot VLE D 7-50W MR16 830 36D


MASTER VALUE LEDspot LV


Photometric data



Spectral Power Distribution Colour - MAS LED spot VLE D 7-50W MR16 830 36D

Lifetime

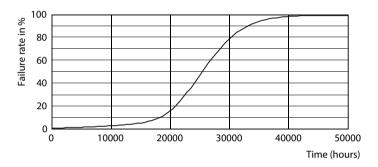

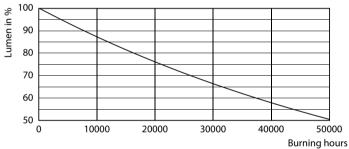

Life Expectancy Diagram - MAS LED spot VLE D 7-50W MR16 830 36D

Lumen Maintenance Diagram - MAS LED spot VLE D 7-50W MR16 830 36D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.