PHILIPS Lighting



A ↑ G

G

MASTER LEDspot ExpertColor MV

MAS LED ExpertColor 3.9-35W GU10 927 25D

MASTER LEDspot ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. They offer superior lighting that has a customized spectrum, high CRI, and deep dimming feature. What's more the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, with MASTER LEDspot ExpertColor you can take advantage of the full ExpertColor family, which also includes LEDspot MR16, LEDspot AR111 and LEDspot PAR lamps. MASTER LEDspot ExpertColor delivers huge energy savings and minimizes maintenance costs without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within a short time period.

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	927
Beam Angle (Nom)	25 degree(s)
Luminous Flux	265 lm
Luminous Intensity (Nom)	700 cd
Color Designation	Warm White (WW)


Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	67.95 lm/W
Color Consistency	<3
Color rendering index (CRI)	97
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	265 lm
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.9 W

MASTER LEDspot ExpertColor MV

Lamp Current (Nom)	22 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Shape	PAR16
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh

544215	
Yes	
No	
MAS LED ExpertColor 3.9-35W GU10	
927 25D	
MAS LED ExpertColor 3.9-35W GU10	
927 25D	
871869670749400	
929001346402	
929001346402	
1	
8718696707494	
10	
8718696707500	


Dimensional drawing



Photometric data

fitting - Sp

Product	D	с
MAS LED ExpertColor 3.9-35W GU10 927 25D	50 mm	54 mm

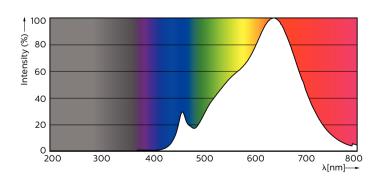


Spectral Power Distribution Colour - MAS LED ExpertColor 3.9-35W GU10 927 25D

Accent Lighting Spots - MAS LED ExpertColor 3.9-35W GU10 927 25D


MASTER LEDspot ExpertColor MV

Photometric data




Light Distribution Diagram - MAS LED ExpertColor 3.9-35W GU10 927 25D

Lifetime

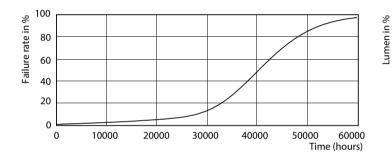

Life Expectancy Diagram - MAS LED ExpertColor 3.9-35W GU10 927 25D

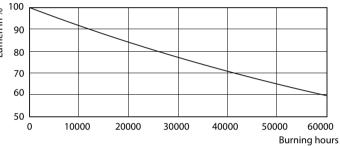

Lumen Maintenance Diagram - MAS LED ExpertColor 3.9-35W GU10 927 25D



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.