



G A

MASTER LEDspot ExpertColor MV

MAS LED ExpertColor 3.9-35W GU10 930 25D

MASTER LEDspot ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. They offer superior lighting that has a customized spectrum, high CRI, and deep dimming feature. What's more the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, with MASTER LEDspot ExpertColor you can take advantage of the full ExpertColor family, which also includes LEDspot MR16, LEDspot AR111 and LEDspot PAR lamps. MASTER LEDspot ExpertColor delivers huge energy savings and minimizes maintenance costs without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within a short time period.

Product data

General Information		
Cap-Base	GU10	
Nominal lifetime	40,000 hour(s)	
Switching Cycle	50,000	
Lighting Technology	LED	
Flux measurement reference	Narrow Cone	
CE mark	Yes	
EU RoHS compliant	Yes	
Light Technical		
Color Code	930 [CCT of 3000K]	
Beam Angle (Nom)	25 degree(s)	
Luminous Flux	280 lm	
Luminous Intensity (Nom)	750 cd	
Color Designation	White (WH)	

Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	71.00 lm/W
Color Consistency	<3
Color rendering index (CRI)	97
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	280 lm
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.9 W


Datasheet, 2024, March 14 data subject to change

MASTER LEDspot ExpertColor MV

Lamp Current (Nom)	22 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Shape	PAR16
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh


EPREL Registration Number	391828	
EyeComfort	Yes	
Anniination Constitue		
Application Conditions		
can it be used in closed luminaires	No	
D. 1 (D.)		
Product Data		
Order product name	MAS LED ExpertColor 3.9-35W GU10	
	930 25D	
Full product name	MAS LED ExpertColor 3.9-35W GU10	
	930 25D	
Full product code	871869670751700	
Order code	929001346502	
Material Nr. (12NC)	929001346502	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8718696707517	
Numerator - Packs per outer box	10	
EAN/UPC - Case	8718696707524	

Dimensional drawing




Product	D	С
MAS LED ExpertColor 3.9-35W GU10 930 25D	50 mm	54 mm

Photometric data






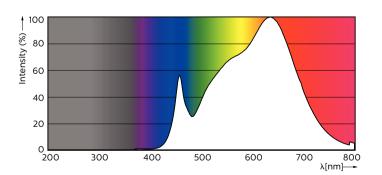

Spectral Power Distribution Colour - MAS LED ExpertColor 3.9-35W GU10 930 25D


MASTER LEDspot ExpertColor MV


Photometric data



Light Distribution Diagram - MAS LED ExpertColor 3.9-35W GU10 930 25D

Lifetime

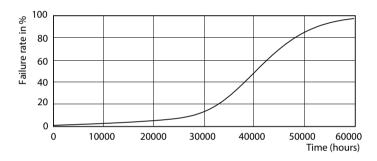



Life Expectancy Diagram - MAS LED ExpertColor 3.9-35W GU10 930 25D

Lumen Maintenance Diagram - MAS LED ExpertColor 3.9-35W GU10 930 25D



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.