# **PHILIPS** Lighting



A ↑ G

F

# MASTER LEDspot ExpertColor MV

# MAS LED ExpertColor 3.9-35W GU10 940 36D

MASTER LEDspot ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. They offer superior lighting that has a customized spectrum, high CRI, and deep dimming feature. What's more the innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, with MASTER LEDspot ExpertColor you can take advantage of the full ExpertColor family, which also includes LEDspot MR16, LEDspot AR111 and LEDspot PAR lamps. MASTER LEDspot ExpertColor delivers huge energy savings and minimizes maintenance costs without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within a short time period.

#### **Product data**

General Information	
Cap-Base	GU10
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	940 [CCT of 4000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	300 lm
Luminous Intensity (Nom)	600 cd
Color Designation	Cool White (CW)


Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	76.00 lm/W
Color Consistency	<3
Color rendering index (CRI)	97
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	300 lm
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.9 W

# MASTER LEDspot ExpertColor MV

Lamp Current (Nom)	22 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	PAR16
Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh


EPREL Registration Number	391831
EyeComfort	Yes
Application Conditions	
can it be used in closed luminaires	No
Product Data	
Order product name	MAS LED ExpertColor 3.9-35W GU10
	940 36D
Full product name	MAS LED ExpertColor 3.9-35W GU10
	940 36D
Full product code	871869670759300
Order code	929001346902
Material Nr. (12NC)	929001346902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696707593
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696707609

#### **Dimensional drawing**



Photometric data

Product	D	с
MAS LED ExpertColor 3.9-35W GU10 940 36D	50 mm	54 mm

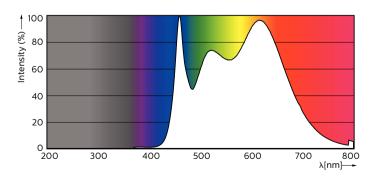


Spectral Power Distribution Colour - MAS LED ExpertColor 3.9-35W GU10 940 36D

Accent Lighting Spots - MAS LED ExpertColor 3.9-35W GU10 940 36D

Datasheet, 2024, March 14


## MASTER LEDspot ExpertColor MV

#### Photometric data



Light Distribution Diagram - MAS LED ExpertColor 3.9-35W GU10 940 36D

### Lifetime

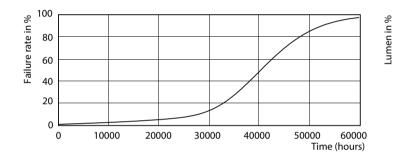



Lumen Maintenance Diagram - MAS LED ExpertColor 3.9-35W GU10 940 36D

30000

40000

50000

60000

**Burning hours** 

20000



100

90

80

70

60

50

0

10000

© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.