



MAS LEDtube 1200mm 14W 840 T8 THD

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

Warnings and Safety

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data

| General Information | | | | |
|------------------------------------|---------------------------------|--|--|--|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] | | | |
| Nominal lifetime | 50,000 hour(s) | | | |
| Switching Cycle | 50,000 | | | |
| Lighting Technology | LED | | | |
| EU RoHS compliant | Yes | | | |
| | | | | |
| Light Technical | | | | |
| Color Code | 840 [CCT of 4000K] | | | |
| Beam Angle (Nom) | 160 degree(s) | | | |
| Luminous Flux | 2,100 lm | | | |
| Color Designation | Cool White (CW) | | | |
| Correlated Color Temperature (Nom) | 4000 K | | | |
| Luminous Efficacy (rated) (Nom) | 150.00 lm/W | | | |
| | | | | |

| Color Consistency | <6 | | | |
|--|-------------|--|--|--|
| Color rendering index (CRI) | 83 | | | |
| LLMF At End Of Nominal Lifetime (Nom) 70 % | | | | |
| | | | | |
| Operating and Electrical | | | | |
| Line Frequency | 50 to 60 Hz | | | |
| Input Frequency | 50 to 60 Hz | | | |
| Power Consumption | 14 W | | | |
| Lamp Current (Max) | 73 mA | | | |
| Lamp Current (Min) | 54 mA | | | |
| Starting Time (Nom) | 0.5 s | | | |
| Warm-up time to 60% light | 0.5 s | | | |
| Power Factor (Fraction) | 0.9 | | | |
| | | | | |


Datasheet, 2023, November 12 data subject to change

| Voltage (Nom) | 220-240 V | | | | |
|---------------------------|--------------------------------------|--|--|--|--|
| | | | | | |
| Temperature | | | | | |
| Ambient temperature range | -20 °C to 45 °C | | | | |
| T-Case Maximum (Nom) | 55 ℃ | | | | |
| | | | | | |
| Controls and Dimming | | | | | |
| Dimmable | No | | | | |
| | | | | | |
| Mechanical and Housing | | | | | |
| Product Length | 1,200 mm | | | | |
| Bulb Shape | Tube, double-ended | | | | |
| | | | | | |
| Approval and Application | | | | | |
| Energy Saving Product | Yes | | | | |
| Approval Marks | CE marking RoHS compliance KEMA Keur | | | | |

certificate


| Energy Consumption kWh/1000 h | 14 kWh | | |
|---------------------------------|-----------------------------------|--|--|
| | | | |
| Product Data | | | |
| Order product name | MAS LEDtube 1200mm 14W 840 T8 THD | | |
| Full product name | MAS LEDtube 1200mm 14W 840 T8 THD | | |
| Full product code | 871869672857400 | | |
| Order code | 929001375208 | | |
| Material Nr. (12NC) | 929001375208 | | |
| Numerator - Quantity Per Pack | 1 | | |
| EAN/UPC - Product/Case | 8718696728574 | | |
| Numerator - Packs per outer box | 10 | | |
| EAN/UPC - Case | 8718696728581 | | |

Dimensional drawing




| Product | D1 | D2 | A1 | A2 | А3 |
|----------------------------|---------|-------|------------|------------|------------|
| MAS LEDtube 1200mm 14W 840 | 25.8 mm | 28 mm | 1,198.2 mm | 1,205.3 mm | 1,212.4 mm |
| T8 THD | | | | | |

Photometric data









Spectral Power Distribution Colour - MAS LEDtube 1200mm 14W 840 T8 THD

Photometric data




Light Distribution Diagram - MAS LEDtube 1200mm 14W 840 T8 THD

Lifetime

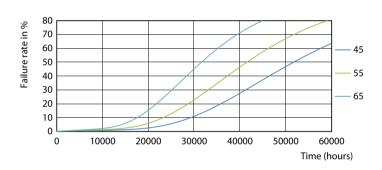


Life Expectancy Diagram - MAS LEDtube 1200mm 14W 840 T8 THD

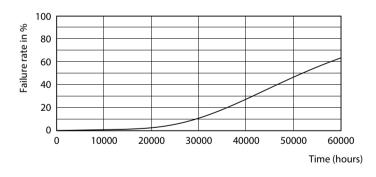


Life Expectancy Diagram - MAS LEDtube 1200mm 14W 840 T8 THD

Life Expectancy Diagram - MAS LEDtube 1200mm 14W 840 T8 THD

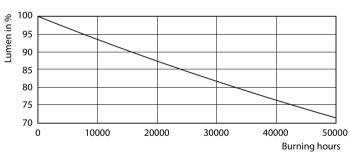

Lumen Maintenance Diagram - MAS LEDtube 1200mm 14W 840 T8 THD

Lifetime

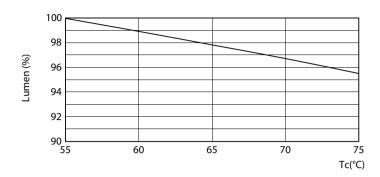

Lumen Maintenance Diagram - MAS LEDtube 1200mm 14W 840 T8 THD



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.