



Decorative LED candles and lustres

Classic LEDCandle D 5-35W E14 GOLD B35 CL

The new Deco collection candles and lustres transforms your home with a perfect blend of warm white light and a lean, minimalistic lighting experience. With long lifetime, up to 90% energy savings, no flickering and an instant full-level brightness, you will also enjoy soft and evenly distributed light with that trendy and stylish charm for a welcoming harmony in your space.

Product data

General Information	
Cap base	E14 [E14]
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Colour Code	825 [CCT of 2500K]
Luminous Flux	410 lm
Colour designation	Warm White (WW)
Correlated Colour Temperature	2500 K
Luminous efficacy (rated) (nom.)	82.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz

Power Consumption	5 W
Lamp current (nom.)	28 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	40 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Lamp Finish	Amber
Bulb shape	B35 [B 35 mm]


Datasheet, 2023, April 29 data subject to change

Decorative LED candles and lustres

Approval and Application		
Energy consumption kWh/1,000 hours	5 kWh	
Product Data		
Order product name	CLA LEDCandle D 5-35W E14 GOLD B35 CL	
Full product name	Classic LEDCandle D 5-35W E14 GOLD B35 CL	
Full EOC	871869675084100	
Order code	75084100	


Material no. (12 NC)	929001395202
SAP numerator – quantity per pack	1
EAN/UPC — Product/Case	8718696750841
Numerator – packs per outer box	10
EAN/UPC - Case	8718696750858
'	

Dimensional drawing




Product	D	С
CLA LEDCandle D 5-35W E14 GOLD B35 CL	35 mm	102 mm


Photometric data



General uniform lighting - CLA LEDCandle D 5-35W E14 GOLD B35 CL




Spectral Power Distribution Colour - CLA LEDCandle D 5-35W E14 GOLD B35 CL




Light Distribution Diagram - CLA LEDCandle D 5-35W E14 GOLD B35 CL

Decorative LED candles and lustres

Lifetime

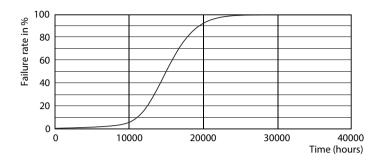



Life Expectancy Diagram - CLA LEDCandle D 5-35W E14 GOLD B35 CL

Lumen Maintenance Diagram - CLA LEDCandle D 5-35W E14 GOLD B35 CL



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.