

MASTER - LED HID SOX

TForce LED SOX D 25-19W B22 740 FR

Philips MASTER LED HID SOX offers an easy and short payback LED solution to replace SOX systems. These lamps bring the LED benefits of energy efficiency and long lifetime to conventional HID SOX replacement. They also come with a low initial investment to ensure instant savings. With the right lamp size, cap and light distribution, you can easily retrofit the traditional SOX system with MASTER LED HID SOX lamp thereby enhancing the light quality with comfort and safety without having to replace the fixtures or sacrifice the light effect

Warnings and Safety

· Please refer to the installation guide or consult a Philips Lighting representative for wiring diagram and instructions.

Product data

General Information	
Cap-Base	B22/BY22d [B22/BY22d]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	740 [CCT of 4000K]
Beam Angle (Nom)	230 degree(s)
Luminous Flux	2,500 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	131.00 lm/W
Color Consistency	<6

Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz
Power Consumption	19 W
Lamp Current (Nom)	450 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	48 V


Datasheet, 2023, November 15 data subject to change

MASTER - LED HID SOX

Temperature	
T-Case Maximum (Nom)	95 ℃
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	Others
Approval and Application	
Energy Consumption kWh/1000 h	21 kWh


TForce LED SOX D 25-19W B22 740 FR
TForce LED SOX D 25-19W B22 740 FR
871869678201900
929001828602
929001828602
1
8718696782019
6
8718696782026

Dimensional drawing




Product	D	С
TForce LED SOX D 25-19W B22 740 FR	54 mm	308 mm

Photometric data




General uniform lighting - TForce LED SOX D 25-19W B22 740 FR



Light Distribution Diagram - TForce LED SOX D 25-19W B22 740 FR


MASTER - LED HID SOX


Photometric data



Spectral Power Distribution Colour - TForce LED SOX D 25-19W B22 740 FR

Lifetime

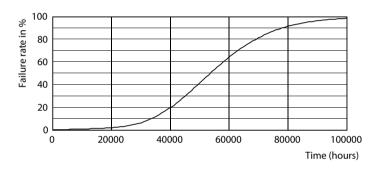



Life Expectancy Diagram - TForce LED SOX D 25-19W B22 740 FR

Lumen Maintenance Diagram - TForce LED SOX D 25-19W B22 740 FR



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.